


HOG 16 + DSL

Encoder with integrated programmable, digital speed switch

Through hollow shaft $\varnothing 20 \dots 50$ mm / 512...2500 pulses per revolution

Overview

- Freely programmable switch-on and switch-off speed
- Programming via included software (RS485 interface)
- Output stages HTL or TTL
- DSL.R: 3 outputs speed controlled
- DSL.E: 2 outputs speed controlled and 1 control output

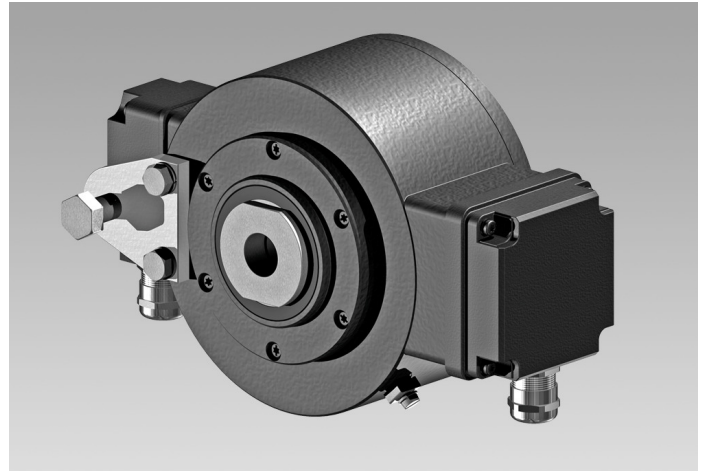

Technical data

Technical data - electrical ratings

Voltage supply	With DSL.R: 15...30 VDC With DSL.E: 9...30 VDC
----------------	---

Consumption w/o load	≤ 200 mA
----------------------	---------------

Sensing method	Optical
----------------	---------

Approval	CE
----------	----

Technical data - electrical ratings (encoder)

Pulses per revolution	512 ... 2500
-----------------------	--------------

Phase shift	$90^\circ \pm 20^\circ$
-------------	-------------------------

Duty cycle	40...60 %
------------	-----------

Reference signal	Zero pulse, width 90°
------------------	------------------------------

Output frequency	≤ 120 kHz
------------------	----------------

Output signals	K1, K2, K0 + inverted
----------------	-----------------------

Output stages	HTL TTL/RS422
---------------	------------------

Technical data - electrical ratings (speed switch)

Interface	RS485
-----------	-------

Switching accuracy	± 2 % (or Digit)
--------------------	----------------------

Switching outputs	With DSL.R: 3 outputs, speed control With DSL.E: 2 outputs, speed control and 1 control output
-------------------	---

Output switching capacity	With DSL.R: 12 VDC; ≤ 40 mA With DSL.E: 5...230 VAC/VDC; 5...250 mA (EAC: < 50 VAC / 75 VDC)
---------------------------	---

Switching delay time	≤ 40 ms
----------------------	--------------

Technical data - mechanical design

Size (flange)	$\varnothing 158$ mm
---------------	----------------------

Technical data - mechanical design

Shaft type	$\varnothing 20 \dots 50$ mm (through hollow shaft)
------------	---

Admitted shaft load	≤ 450 N axial ≤ 600 N radial
---------------------	---

Protection EN 60529	IP 66
---------------------	-------

Speed (n)	≤ 6000 rpm
-----------	-----------------

Range of switching speed (ns)	Pulses = 512: $\pm 16 \dots 6000$ rpm Pulses = 1024: $\pm 8 \dots 6000$ rpm Pulses = 2000: $\pm 5 \dots 3600$ rpm Pulses = 2048: $\pm 4 \dots 3500$ rpm Pulses = 2500: $\pm 3 \dots 2900$ rpm
-------------------------------	---

Operating torque	≤ 15 Ncm
------------------	---------------

Rotor moment of inertia	4.9 kgcm ²
-------------------------	-----------------------

Material	Housing: aluminium Shaft: stainless steel
----------	--

Operating temperature	$-20 \dots +85^\circ\text{C}$
-----------------------	-------------------------------

Resistance	IEC 60068-2-6 Vibration 15 g, 10-2000 Hz IEC 60068-2-27 Shock 300 g, 6 ms
------------	--

Corrosion protection	IEC 60068-2-52 Salt mist for ambient conditions C4 according to ISO 12944-2
----------------------	--

Connection	2x terminal box 3x terminal box (with option M)
------------	--

Weight approx.	4 kg 5 kg (with option M)
----------------	------------------------------

Interference immunity	EN 61000-6-2
-----------------------	--------------

Emitted interference	EN 61000-6-3
----------------------	--------------

Approval	CE
----------	----

Optional

- Relay module DS 93 R (DSL.R version only)
- Redundant sensing (option M)
- Hybrid bearing
- Earthing brushes

HOG 16 + DSL


Encoder with integrated programmable, digital speed switch

Through hollow shaft $\varnothing 20 \dots 50$ mm / 512...2500 pulses per revolution

Terminal assignment


View A (see dimension)

Connecting terminal terminal box encoder

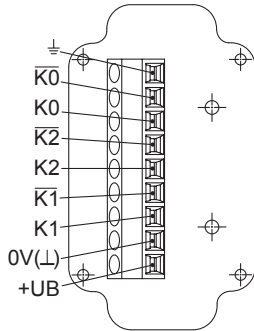


View B (see dimension)

Connecting terminal speed switch DSL.R

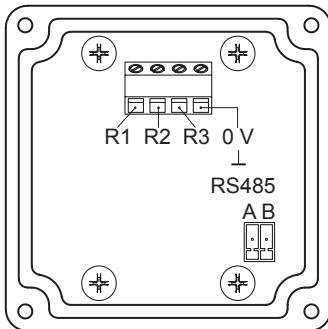

View B (see dimension)

Connecting terminal speed switch DSL.E

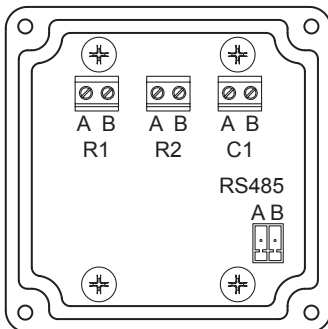

Terminal significance

Encoder incremental

+UB	Voltage supply
0V (⊥)	Ground
⊥	Earth ground (housing)
K1	Output signal channel 1
K1	Output signal channel 1 inverted
K2	Output signal channel 2 (offset by 90° to channel 1)
K2	Output signal channel 2 inverted
K0	Zero pulse (reference signal)
K0	Zero pulse inverted

Terminal significance

Speed switch DSL.R

R1*	Transistor switching output 1, individually adjustable switching speed, High (12 V), Low (0 V), max. 20 mA
R2*	Transistor switching output 2, individually adjustable switching speed, High (12 V), Low (0 V), max. 20 mA
R3*	Transistor switching output 3, individually adjustable switching speed, High (12 V), Low (0 V), max. 20 mA
GND*	Ground connection
RS485	Interface for PC or Laptop (adapter required). Programming of the DSL via the included software.

* Connection to relay module, for example DS 93 R (accessory)


Speed switch DSL.E

R1 (A+B)	Electronic relay output 1, individually adjustable switching speed, 5...230 V AC/DC
R2 (A+B)	Electronic relay output 2, individually adjustable switching speed, 5...230 V AC/DC
C1 (A+B)	Electronic relay output as a control output, 5...250 mA
RS485	Interface for PC or Laptop (adapter required). Programming of the DSL via the included software.

Output signals

HTL/TTL

At positive rotating direction (see dimension)

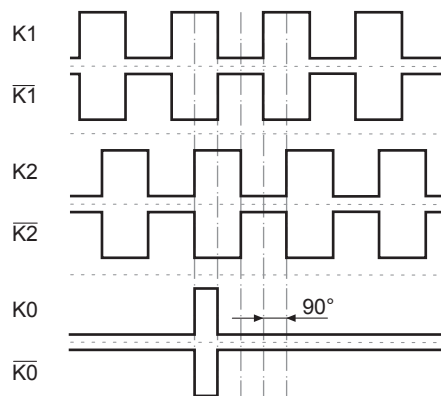


HOG 16 + DSL



Encoder with integrated programmable, digital speed switch

Through hollow shaft $\varnothing 20 \dots 50$ mm / 512...2500 pulses per revolution


Block circuit diagram

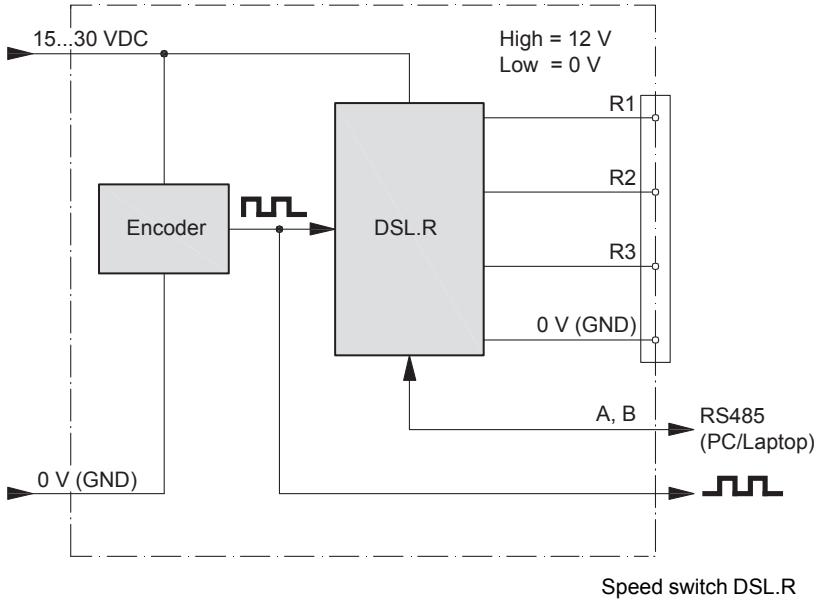


Switching characteristics

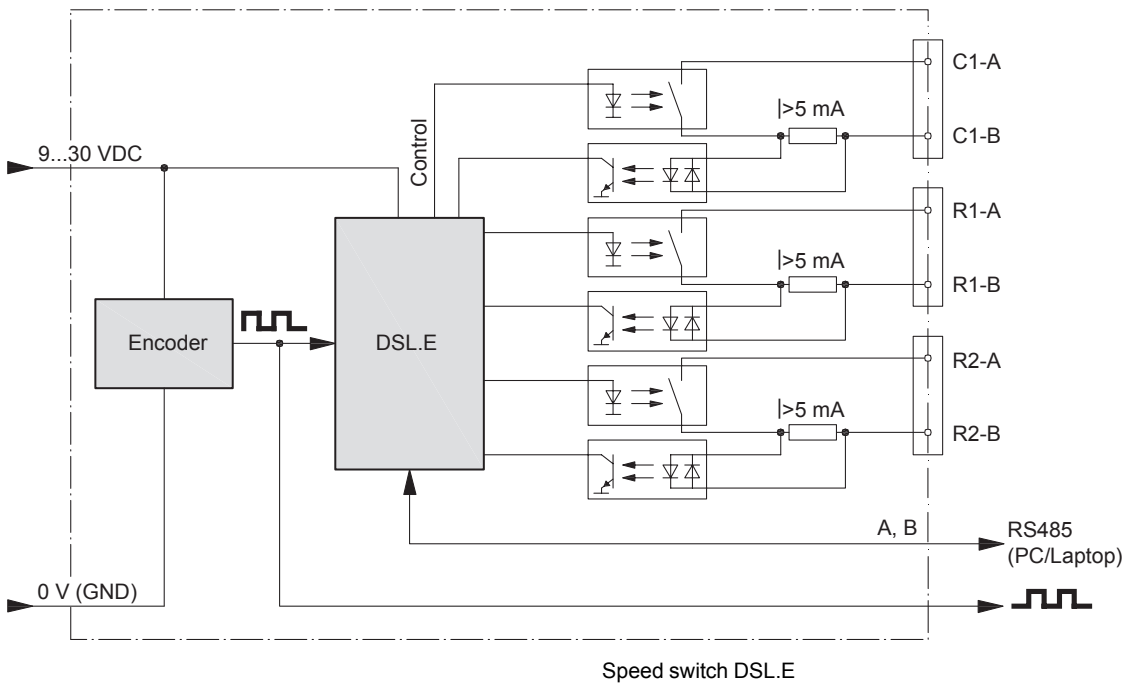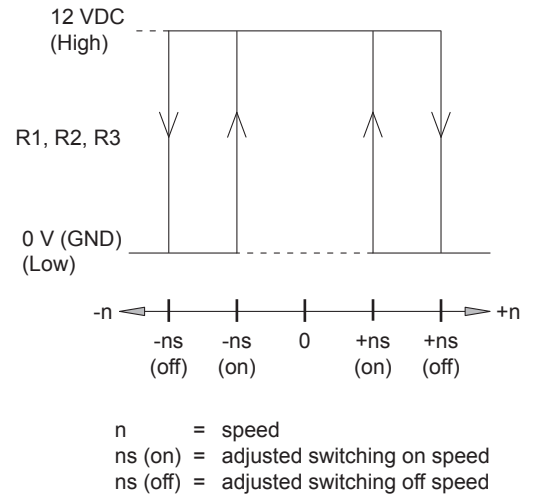



Dimensions

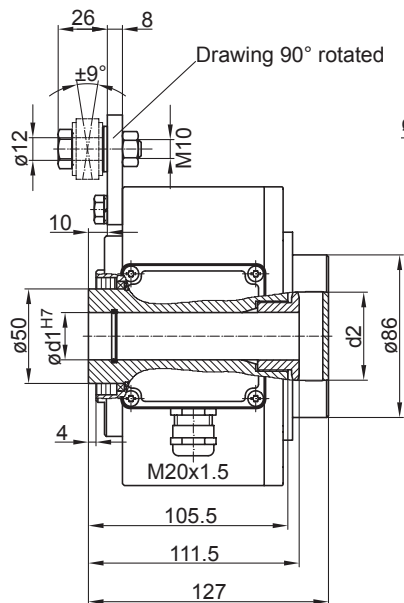

ød1	d2
20	36 a/f
25	36 a/f
30	46 a/f

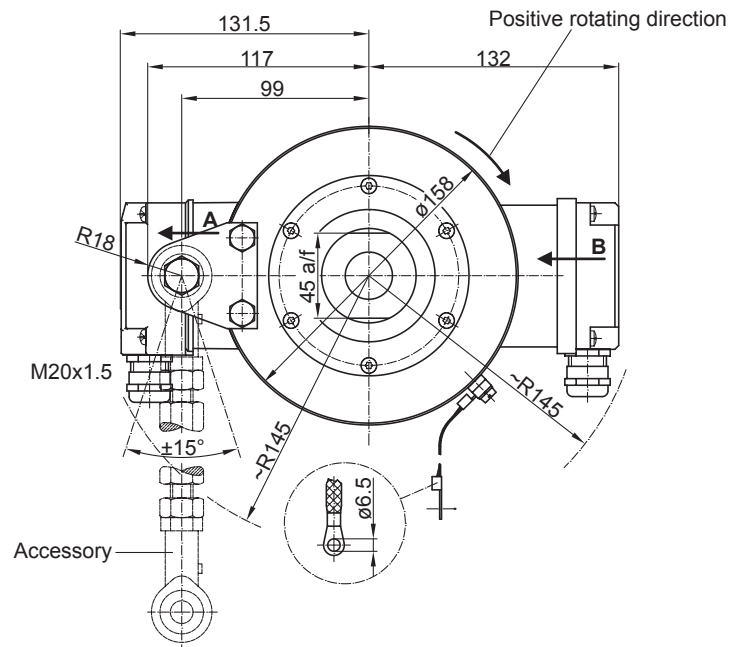

With single sensing and insert nut

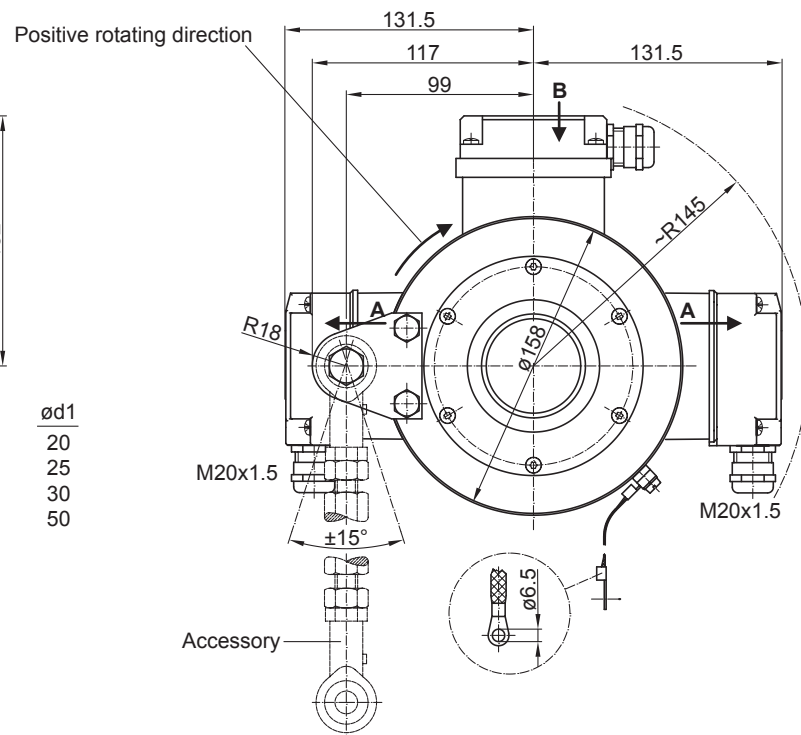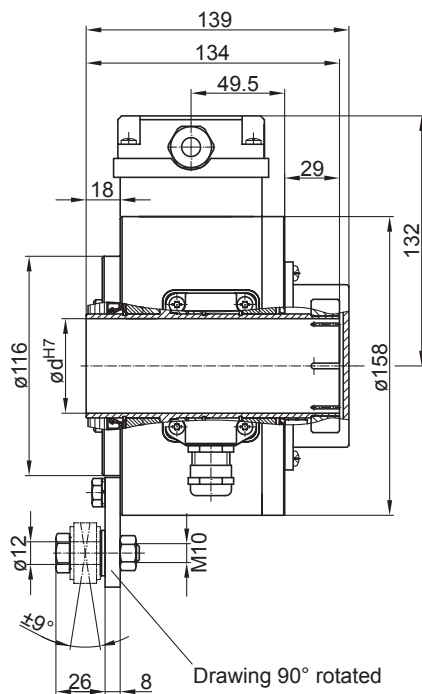

With redundant sensing and clamping ring

HOG 16 + DSL

Encoder with integrated programmable, digital speed switch

Through hollow shaft ø20...50 mm / 512...2500 pulses per revolution

Ordering reference

	HOG16	#	#	DN	####	#	#####	#####
Product								
Incremental encoder + Speed switch	HOG16							
Shaft type								
Standard ball bearings								
With hybrid bearings			C					
Redundant sensing								
Without redundant sensing								
With redundant sensing			M					
Output signals								
K1, K2, K0				DN				
Pulse number								
512					512			
1024					1024			
2048					2048			
2500					2500			
Incremental output								
Output circuit HTL with inverted signals						I		
Output circuit TTL with inverted signals						R		
Shaft diameter								
Blind hollow shaft ø20 mm							20H7	
Through hollow shaft ø25 mm							25H7	
Through hollow shaft ø30 mm							30H7	
Through hollow shaft ø50 mm							50H7	
Version speed switch								
2 outputs, speed control and 1 control output								+ DSL.E
3 outputs, speed control								+ DSL.R

Accessories

Mounting accessories

11054922	Torque arm M12, length 145...170 mm
11054921	Torque arm M12, length 180...205 mm
11072741	Torque arm M12, length 480...540 mm (≥200 mm)
11054924	Torque arm M12 insulated, length 145...170 mm
11072723	Torque arm M12 insulated, length 480...540 mm (≥200 mm)
11069336	Mounting kit for torque arm size M12 and an earthing strap

Connectors and cables

	Sensor cable for encoders HEK 8
11064248	USB → RS485 converter
11117345	USB → RS485 converter with connecting cable for DSL

Diagnostic accessories

11075858	Analyzer for encoders HENQ 1100
11075880	Analyzer for encoders HENQ 1100 B