

### Main features

- Graphical display with backlight
- Showing errors and limits by steady or flashing colours
- Fits Baumer *CombiSeries*<sup>™</sup> (Ø80 mm FlexHousing)
- Hygienic design
- Option: Two configurable relay outputs
- Programmable by touch screen
- Easy and fully programmable with FlexProgrammer 9701
- ATEX
- UL

### Applications

- Remote display fits for all 4 - 20 mA transmitter
- Wall mounting, panel mounting and pipe mounting

### Technical Data

Input		Relay	
Measuring range	3.5...23 mA (normal working range 4...20 mA)	Contacts	2 solid state relays
Connections	2 screw terminals for loop power, signal 4 screw terminals for relay outputs	Voltage	60 Vp
Accuracy	≤ ±0.1% of input span within -10...70 °C ≤ ±0.2% of input span within -30...-10 °C / 70...80 °C	Load Current	75 mA
Loop voltage drop	Two levels depending on chosen backlight brightness @ 20 mA : - Low bright backlight (<40%) : Max. 4V @23 °C - High bright backlight (>40%) : Max. 6.5V @23 °C	Max On resistance	10 Ohm The built in relays are not activated as standard. They can be activated at purchase or SW activation code can be purchased later.
Sample time	≤ 1 second. Typical 0.3 second	Response time	0.6 s typ., with standard screen 1.5 s typ., with product specific screen
Start-up time	≤ 5 second	<b>Display</b>	
<b>User-configurable data</b>		Type	FSTN Graphically LCD
Measuring range	4...20 mA	Measuring range	-9999...99999
Error/warning indication	Individually configurable display and backlight indication in white, green or red colour, steady or flashing light. Configurable limits between 3.5 and 23 mA	Digit height	Max. 22 mm
Zoom on range	Minimum 2 mA of input span	<b>EMC data</b>	
Damping	0...30 seconds	Immunity	EN 61326
Linearization table	2 to 30 points	Emission	EN 61326
Measuring unit (standard selectable)	°C, °F, K bar, mbar, kPa, MPa, psi, kg/cm <sup>2</sup> , mmHg, mH <sub>2</sub> O, atm, "Hg, mHg, "H <sub>2</sub> O, %, l/h, Ton, m <sup>3</sup> , m <sup>3</sup> /h, Hz, mS, mV, V, ohm, Hz, sec, %, mA, or user defined (programmable with FlexProgrammer)	EMC immunity Influence	≤ ±1% of input FS
User defined unit	8 x 20 pixels matrix	<b>Communication</b>	
Dec. point position	xxxxx, xxxx.x, xxx.xx, xx.xxx, x.xxxx, .xxxxx, AUTO	FlexProgrammer 2-way communication for configuration.	
		<b>Test conditions</b>	
		Operating temperature	23°C ± 2 °C
		<b>Compliance and approvals</b>	
		Approvals	cULus listed, E491206 IEC 61010-1:2010 IEC 61010-2-201:2013

## Technical Data

### Environmental conditions

Optimal readability	-10...70 °C
Operating temperature	-30...80 °C
Storage temperature	-40...85 °C
Humidity	max. 98% RH, condensing
Vibrations	IEC60068-2-6, test FC 25...100 Hz, 4.0g DNV high vibration strain, class B 1.6mm, 2...25 Hz
Mechanical tolerances	ISO 2768-m

### Mechanical data

Dimensions	See dimensional drawing
Material	Polycarbonate plastic
Enclosure	FlexHousing and front ring stainless steel, AISI 304
Protection class	IP 10 on terminals IP 67 in FlexHousing
Weight	100 g - display alone 170 g - display incl. front ring 475 g - display in FlexHousing for wall mounting

### Other data


Temperature drift	≤ 0,001%/10K (inside optimal readability temperature range) ≤ 0,0015%/10K (outside optimal readability temperature range)
Power up time	≤ 15 sec.

### Disposal of product and packing

According to national laws or by returning to Baumer.

## Programming

Connect the FlexProgrammer to the *CombiView*, DFON as per below.



It is not necessary to disconnect the power to the *CombiView*, DFON display

The FlexProgrammer 9701 is a dedicated tool to Configure all Baumer configurable products.



FlexProgrammer, No. : 9701.0001

The FlexProgrammer interface unit will be delivered complete including

- CD with FlexProgram software
- Product drivers (DTM-files)
- cables

The *CombiView*, DFON can also be programmed by the touch bottoms on the display. Please see "Operating instructions for *CombiView*, DFON".


### ATEX Gas ia and for ATEX Dust ia

Approval	Gas Zone 0/1	Ex II 1 G, Ex ia IIC T5 Ga
	Dust Zone 20/21	Ex II 1 D, Ex ia IIIC T100°C Da
Voltage drop	$U_{Disp}$	4.5 ... 6.5 VDC
Temperature class	T1...T5	Zone 0 and 20 -20 ... 60 °C Zone 1/2 and 21/22 -30 ... 65 °C
Internal inductivity	$L_i$	<10 µH
Internal capacity	$C_i$	<15 nF
Barrier data	$U_i$	<30 VDC
	$I_i$	<0.1 A
	$P_i$	<0.75 W

### ATEX Gas nA

Approval	Gas Zone 2	Ex II 3 G, Ex nA II T5
Voltage drop	$U_{Disp}$	4.5 ... 6.5 VDC
Temperature class	T1...T5	-30 < $T_{amb}$ < 65 °C
Internal inductivity	$L_i$	<10 µH
Internal capacity	$C_i$	<15 nF
Maximum voltage	$U_{max}$	<35 VDC
Maximum current	$I_{max}$	<0.1 A

### Electrical connections

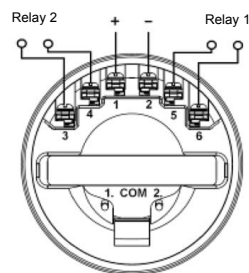

Terminal 1 - Supply +  
Terminal 2 - Supply -


Terminal 3 - Relay 2  
Terminal 4 - Relay 2

Terminal 5 - Relay 1  
Terminal 6 - Relay 1


## Electrical connections

### ATEX Gas ia and for ATEX Dust ia


Display in the zone, transmitter outside the zone

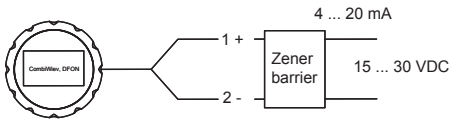


Display and transmitter in the zone

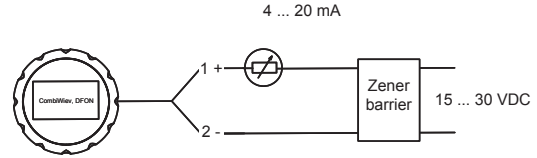

Display in the zone/transmitter outside the zone

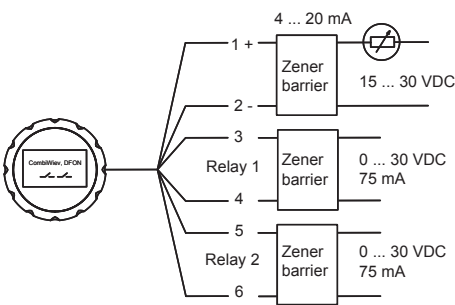


Display and transmitter in the zone

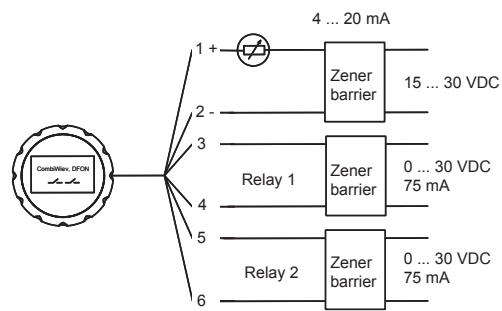


### ATEX Gas nA

Display without relay output

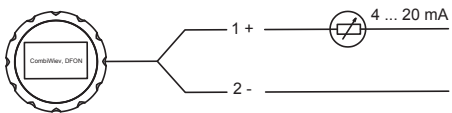

Display with relay output

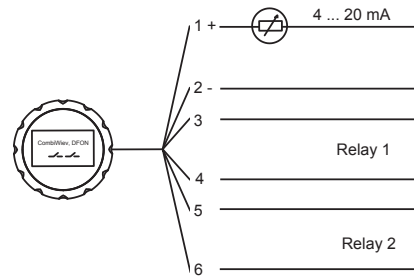

## Selectable views



**Value**  
Small / Large



**Analog**  
w. Bar graph / Value



**Bar graph**  
Vertical / horizontal



**Tank illustration**  
Tank / Bottle

## Visual alert




**Status ok**



**Alert status**

**Drawings / Dimensions in mm**

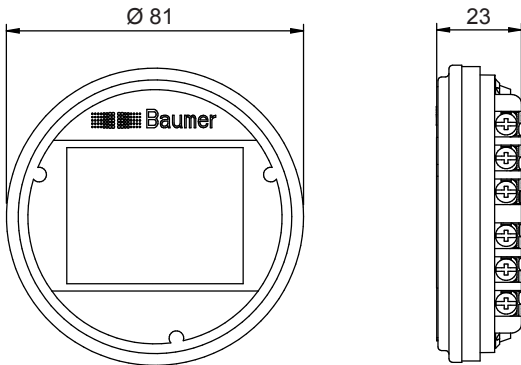


**Mounting for stand alone instrument**

**Wall mounting, DFON-xxx2.2x**




**FlexHousing with Ø110 mm rear flange with 3 x Ø4 mm holes for screws**

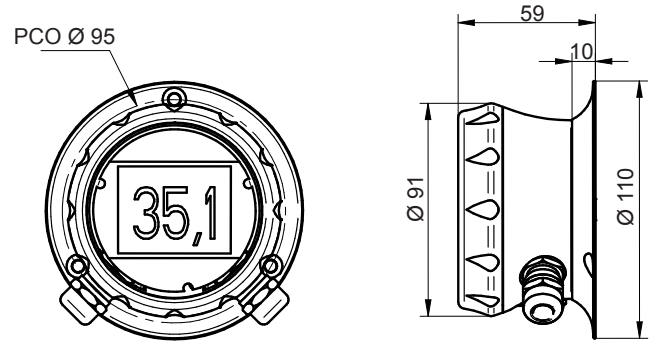

**Panel mounting, DFON-xxx2.30**




**Ø110 mm front flange with 3 x Ø4 mm holes for screws**

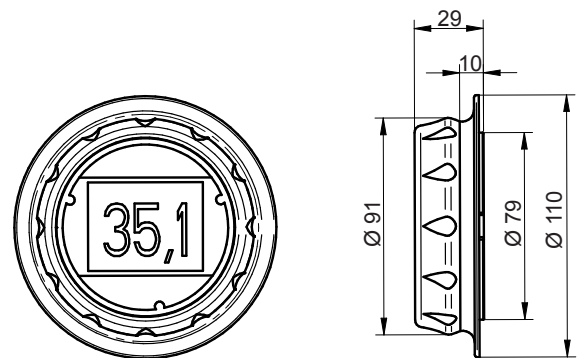

**Pipe mounting, DFON-xxx2.4x / ...2.5x / ...2.6x**



**FlexHousing with pipe bracket for Ø38, Ø51, Ø64 mm stand pipe**

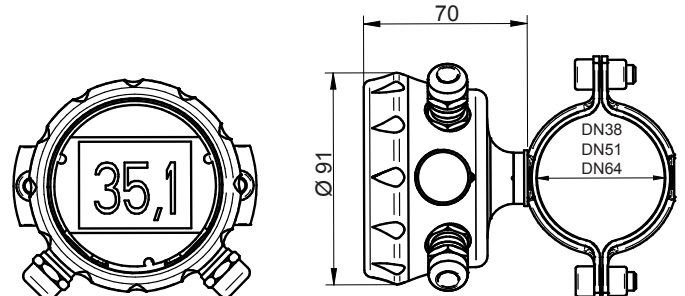

## Ordering details

	DFON	-							
<b>Model</b>	DFON								
CombiView									
<b>Safety</b>									
Standard									1
EX II 3G, Ex nA II T5									3
EX II 1 G Ex ia IIC T5 Ga or EX II 1D Ex ia IIIC T100°C Da									5
<b>Relays</b>									
Not activated									1
Activated									2
<b>Configuration</b>									
None									0
Configured according to customer specification									1
<b>Front ring</b>									
None									0
Front ring for FlexHousing (CombiSeries)									2
<b>Housing</b>									
None									0
FlexHousing wall mounting									2
FlexHousing panel mounting									3
FlexHousing tube mounting DN38									4
FlexHousing tube mounting DN51									5
FlexHousing tube mounting DN64									6
<b>Electrical connection on housing</b>									
None									0
1 x M16 plastic cable gland									3
2 x M16 plastic cable gland									4
1 x M16 stainless steel cable gland									5
2 x M16 stainless steel cable gland									6
1 x M20 plastic cable gland									7
2 x M20 plastic cable gland									8
1 x M20 stainless steel cable gland									9
2 x M20 stainless steel cable gland									A
2 x M12, 4 pins stainless steel (female + male) for PF20x									B
2 x M12, 4 pins stainless steel (female + male) for 4...20 mA									C
1 x M16 stainless steel cable gland + 1 x M12, 4 pins stainless steel (male) for PF20x									D
1 x M16 stainless steel cable gland + 1 x M12, 4 pins stainless steel (male) for 4...20 mA									E

### Accessories, Software for relays

Activation code for relays (for instruments with not activated relays)  
UnitCom ribbon cable (for retrofitting of DFON on AFix and PFMx)

DFO-SW  
11128715