

ExEIL580-SC

Solid shaft with clamping flange

100...5000 pulses per revolution

Overview

- Size $\varnothing 58$ mm
- Precise optical sensing
- Output signal level TTL or HTL
- Clamping flange
- Connection axial, radial or tangential
- Pulses per revolution up to 5000
- High resistance to shock and vibrations
- Option 0122, Explosion protection zone 22



Technical data

Technical data - electrical ratings

Voltage supply	5 VDC ± 5 % 8...30 VDC 4.75...30 VDC
Reverse polarity protection	Yes
Short-circuit proof	Yes (HTL) Yes (TTL, max. 1 s and 1 signal)
Consumption w/o load	≤ 70 mA
Pulses per revolution	100 ... 5000
Phase shift	$90^\circ \pm 10^\circ$
Duty cycle	40...60 %
Reference signal	Zero pulse, width $90^\circ \pm 10$ %
Sensing method	Optical
Output frequency	≤ 300 kHz (TTL) ≤ 160 kHz (HTL)
Output signals	A+, B+, R+, A-, B-, R-
Output stages	TTL/RS422 HTL/push-pull
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3

Technical data - mechanical design

Size (flange)	$\varnothing 58$ mm
Shaft type	$\varnothing 10 \times 20$ mm, solid shaft with flat

Technical data - mechanical design

Admitted shaft load	≤ 40 N axial ≤ 80 N radial
Flange	Clamping flange
Protection EN 60529	IP 65
Operating speed	≤ 12000 rpm (+20 °C) ≤ 11000 rpm (+40 °C) ≤ 8000 rpm (+60 °C)
Starting torque	≤ 0.015 Nm (+20 °C)
Material	Housing: aluminium die-cast Flange: aluminium Solid shaft: stainless steel
Ambient temperature	-20...+60 °C
Relative humidity	90 % non-condensing
Resistance	EN 60068-2-6 Vibration 30 g, 10-2000 Hz EN 60068-2-27 Shock 300 g, 6 ms
Explosion protection	II 3 D Ex tc IIIC T135°C Dc X (dust): see special conditions "X"
Connection	Flange connector M12, 8-pin Flange connector M23, 12-pin Cable
Weight approx.	300 g

ExEIL580-SC

Solid shaft with clamping flange

100...5000 pulses per revolution


Terminal assignment

Flange connector M23, 12-pin / cable

Pin	Core color	Assignment
1	pink	B-
2	—	—
3	blue	R+
4	red	R-
5	green	A+
6	yellow	A-
7	—	—
8	grey	B+
9	—	—
10	white	GND
11	—	—
12	brown	UB


Screen: Connected to housing

Cable data: PVC, [4x2x0.14 mm²], bending radius >32.5 mm, outer diameter 6.5 mm




Flange connector M12, 8-pin

Pin	Assignment
1	GND
2	UB
3	A+
4	A-
5	B+
6	B-
7	R+
8	R-



Output signals

Clockwise rotating direction when looking at flange.

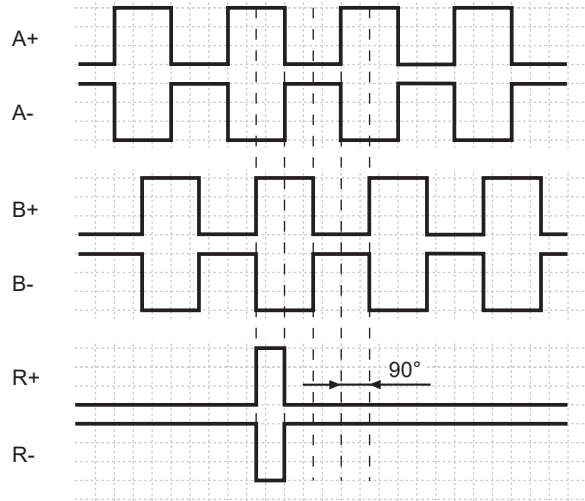

Trigger level

Outputs	TTL/RS422
Output level High	≥ 2.5 V
Output level Low	≤ 0.5 V
Load	≤ 20 mA

Outputs	HTL/Push-pull
Output level High	$\geq UB - 3$ V
Output level Low	≤ 1.5 V
Load	≤ 20 mA

ExEIL580-SC

Solid shaft with clamping flange

100...5000 pulses per revolution

Explosion protection

⚠ II 3 D Ex tc IIIC T135°C Dc X (dust)

General- and Special conditions „X“:

Only put the device into operation if ...

- all necessary precautions have been taken by the operator to make sure device and connector are fully protected against mechanical impacts or shocks in compliance with EN 60079-0, section 26.4.2 (Special conditions „X“).
- the connection is mechanically or electrically secured to prevent any interrupt while the contact is live (Special conditions „X“).
- it has been ensured the electrical connection of product variants with cable outlet or cable couplings is outside zone 22 (Special conditions „X“).
- it has been ensured the maximum operating speed in relation to the ambient temperature is within the specifications on the table „Maximum rotation speed below“ (Special conditions „X“).
- the specifications on the product label match the on-site conditions for use in hazardous areas (EX) (device group, category, zone, temperature class resp. maximum surface temperature).
- the specifications on the product label comply with the prevailing grid conditions.
- the device shows no visible trace of damage (resulting from transport or storage), and
- it has been ensured no explosive atmosphere, oils, acids, gases, vapors, radiation etc. are present during installation.

Observe standard EN 60079-14 for installation and commissioning.

Device operation must observe the installation and operating instructions. The intended use and application of the device comes under the relevant legislation as well as applicable directives and standards.

Maximum rotation speed


	ambient temperature	rotation speed
solid shaft	20 °C	≤ 12000 rpm
	40 °C	≤ 11000 rpm
	60 °C	≤ 8000 rpm
through hollow shaft	20 °C	≤ 6000 rpm
	40 °C	≤ 4500 rpm
	60 °C	≤ 2500 rpm
blind hollow shaft	20 °C	≤ 8000 rpm
	40 °C	≤ 8000 rpm
	60 °C	≤ 5000 rpm

ExEIL580-SC

Solid shaft with clamping flange


100...5000 pulses per revolution

Dimensions

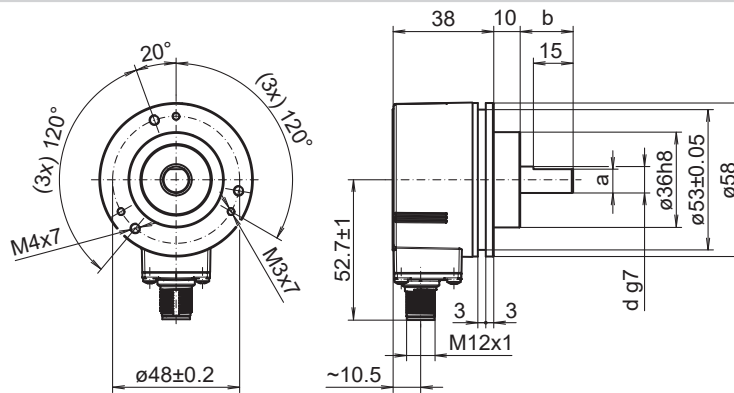


Clamping flange, flange connector M12, radial

d g7	a	b
ø9.525	8.64	20.32
ø10	9.	20

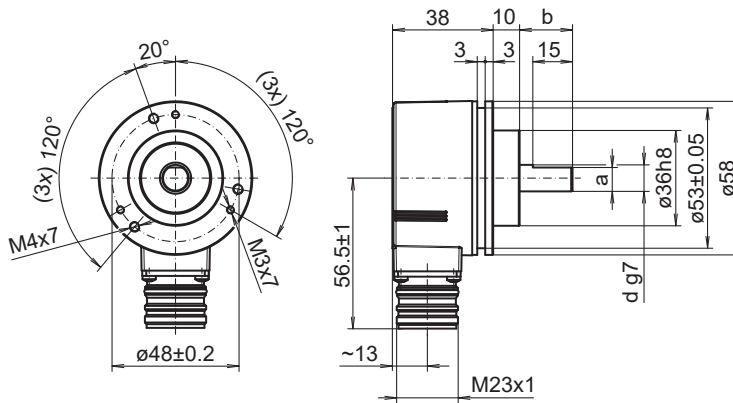

Clamping flange, flange connector M23, radial

d g7	a	b
ø9.525	8.64	20.32
ø10	9.	20

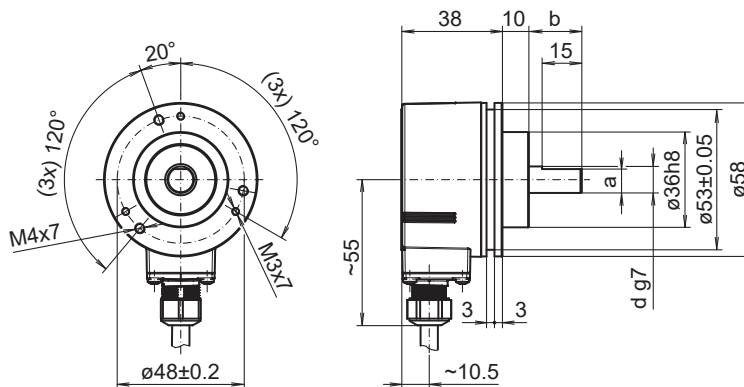

Clamping flange, cable, radial


d g7	a	b
ø9.525	8.64	20.32
ø10	9.	20

ExEIL580-SC


Solid shaft with clamping flange

100...5000 pulses per revolution


Dimensions

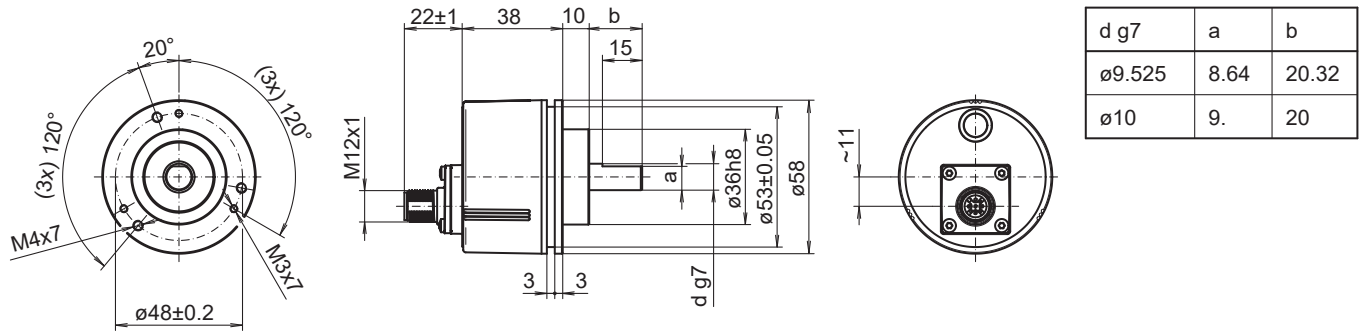


Clamping flange, flange connector M12, axial

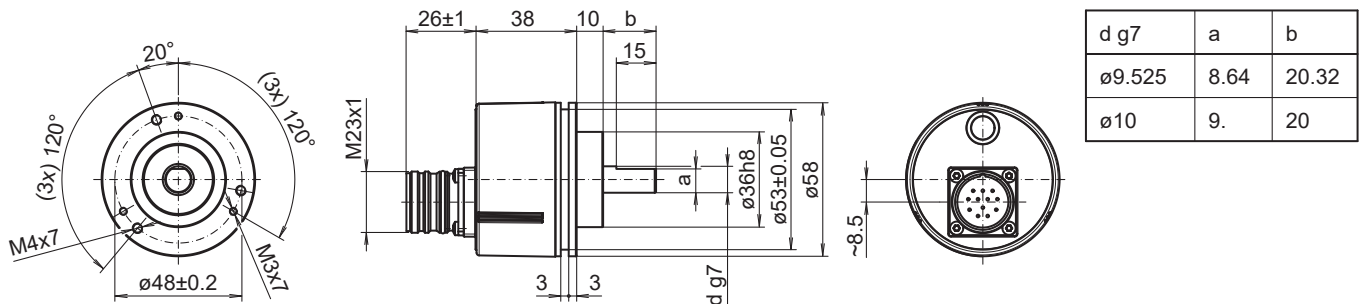

Clamping flange, flange connector M23, axial

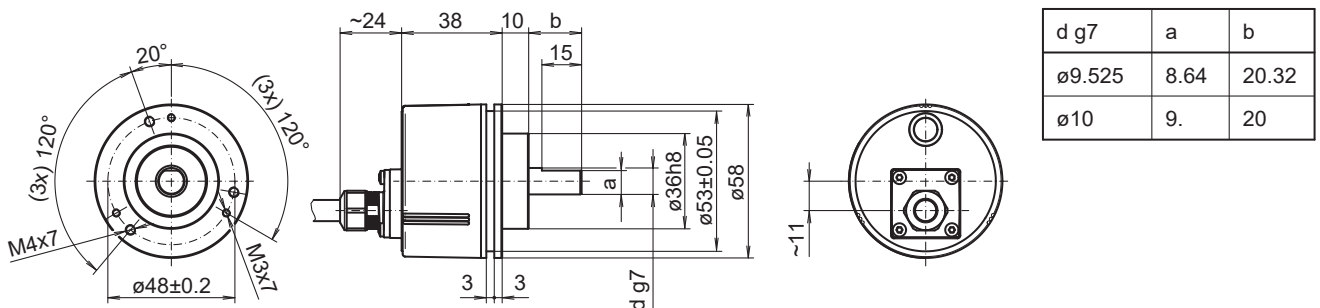

Clamping flange, cable, axial

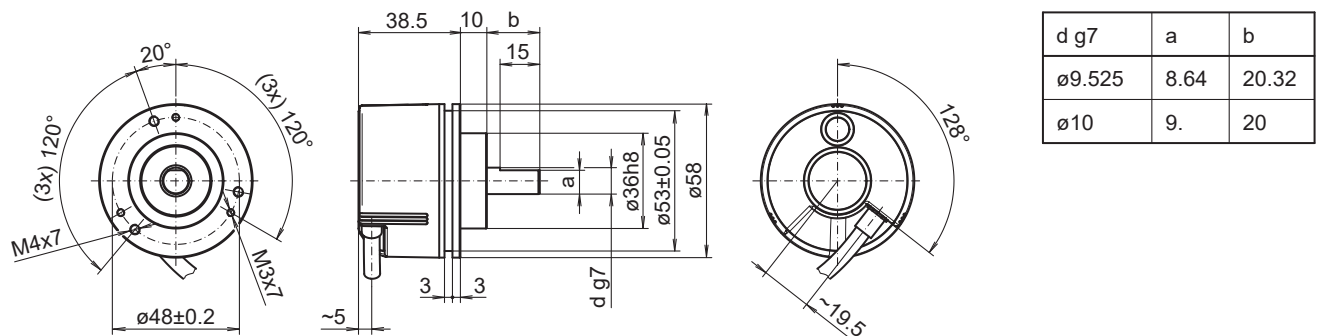

Clamping flange, cable, tangential

ExEIL580-SC

Solid shaft with clamping flange

100...5000 pulses per revolution

Ordering reference

	ExEIL580	-	S	C	##	.	5	##	#	.	####	.	F	/	0122
Product	ExEIL580														
Shaft type															
Solid shaft				S											
Flange (shaft)															
Clamping flange, centering collar ø36 x 10 mm, pitch circle diameter 48 mm - 3xM3/3xM4				C											
Shaft															
ø10 x 20 mm, with flat							10								
ø3/8 x 4/5 (Ø9.525 x 20.32 mm), with flat							U3								
Protection class															
IP 65								5							
Connection															
Flange socket axial, M12, 8-pin, male contacts, CCW									A						
Flange socket radial, M12, 8-pin, male contacts, CCW									B						
Flange socket axial, M23, 12-pin, male contacts, CCW									D						
Flange socket radial, M23, 12-pin, male contacts, CCW									F						
Cable radial, 2 m									L						
Cable tangential, 1 m									P						
Cable tangential, 2 m									Q						
Cable radial, 1 m									R						
Cable axial, 1 m									T						
Cable axial, 2 m									U						
Voltage supply / output															
5 VDC, TTL/RS422, 6 channel									E						
8...30 VDC, TTL/RS422, 6 channel (Vout=5V)									H						
8...30 VDC, HTL/push pull, 6 channel									N						
4,75...30 VDC, HTL/push pull, 6 channel (Vout=Vin)									Q						

ExEIL580-SC

Solid shaft with clamping flange

100...5000 pulses per revolution

Ordering reference

	ExEIL580	-	S	C	##	.	5	##	#	.	####	.	F	/	0122
Pulse number															
100															100
120															120
150															150
200															200
250															250
256															256
300															300
360															360
400															400
500															500
512															512
600															600
720															720
800															800
900															900
1000															1000
1024															1024
1200															1200
1250															1250
1440															1440
1500															1500
1800															1800
2000															2000
2048															2048
2500															2500
3000															3000
3600															3600
4000															4000
4096															4096
5000															5000
Operating temperature															
-20...+60 °C															F

Optionen BT

ATEX Zone 22

0122

ExEIL580-SC

Solid shaft with clamping flange

100...5000 pulses per revolution

Accessories

Mounting accessories

11065915	Coupling CPS25 L=19 d1=04/d2=10
11065918	Coupling CPS25 L=19 d1=07/d2=10
11065920	Coupling CPS25 L=19 d1=08/d2=10
11065921	Coupling CPS25 L=19 d1=09/d2=10
11065922	Coupling CPS25 L=19 d1=10/d2=06
11065923	Coupling CPS25 L=19 d1=10/d2=10
11065924	Coupling CPS25 L=19 d1=10/d2=11
11065925	Coupling CPS25 L=19 d1=10/d2=12
10141132	Spring washer coupling D1=6 / D2=10 (Z 121.C01)
10141133	Spring washer coupling D1=10 / D2=10 (Z 121.C03)
11034138	Spring washer coupling D1=10 / D2=16 (Z 121.C04)
11034140	Spring washer coupling D1=10 / D2=14 (Z 121.C06)
11034141	Spring washer coupling D1=10 / D2=12 (Z 121.C07)
11050507	Bellows coupling aluminium/stainless steel D1=06 / D2=10
11101781	Double loops coupling (D1=10 / D2=10)
10125051	Mounting adaptor for encoders with clamping flange (M3) (Z 119.017)
11065545	Set of eccentric fixings type A
11101893	Spring encoder arm