

**Overview**

- Large measuring range from 0...10 mm
- IO-Link Dual Channel with 2 independent switching outputs
- Easy commissioning due to linearized output signal
- Application-specific setting by qTeach or Teach via IO-Link
- Extended IO-Link diagnostic data and histograms
- Robust plastic housing usable up to +75°C



Picture similar

**IO-Link**

**Technical data**

**General data**

Mounting type	Non-flush
Special type	Linearized
Type	Distance measuring
Measuring distance Sd	0 ... 10 mm
Resolution	< 0.022 mm (High Accuracy Mode)
Repeat accuracy	0.022 mm
Adjustment	qTeach, IO-Link
Teach	Single point, Two point, Window
Linearity error	± 40 µm (S = 0 ... 8 mm) ± 60 µm (S = 0 ... 10 mm)
Temperature drift	± 2 % (Full Scale)
Hysteresis	< 99 % (adjustable)
Power on indication	LED green
Output indicator	LED yellow
Output indicator Output 2	LED red

**Electrical data**

Response time (factory characteristic)	< 0.6 ms (High Speed Mode) < 0.9 ms (Standard Mode) < 2.3 ms (Robust Mode) < 10.5 ms (High Accuracy Mode)
Switching frequency	800 Hz (High Speed Mode) 500 Hz (Standard Mode) 150 Hz (Robust Mode) 30 Hz (High Accuracy Mode)
Voltage supply range +Vs	8 ... 30 VDC
Current consumption max. (no load)	25 mA
Output circuit	PNP Push-pull
Output current	< 100 mA, sum of all outputs
Short circuit protection	Yes
Reverse polarity protection	Yes

**Mechanical data**

Type	Rectangular
Housing material	SAN
Dimension	20 mm
Housing length	41 mm
Connection types	Connector M8

**Ambient conditions**

Operating temperature	-25 ... +75 °C
Protection class	IP 67

**Communication interface**

Interface	IO-Link V1.1
Baud rate	230,4 kBaud (COM 3)
Cycle time	≥ 0.6 ms
Process data length	32 Bit
Process data structure	Bit 0 = SSC1 (distance) Bit 1 = SSC2 (distance) Bit 3 = alarm Bit 4 = SSC3 (frequency) Bit 5 = SSC4 (counter) Bit 16-31 = 16 Bit measurement
IO-Link port type	Class A
Adjustable parameters	Measuring range Switching point Switching hysteresis Measured value filtering Time filters Output logic Output circuit Counter Deactivate the sensor element Find Me function


The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

**Technical data**


**Communication interface**

Additional data	Distance
	Frequency
	Operating cycles
	Operating hours
	Boot cycles
	Operating voltage
	Device temperature
	Histograms


**Dimension drawing**

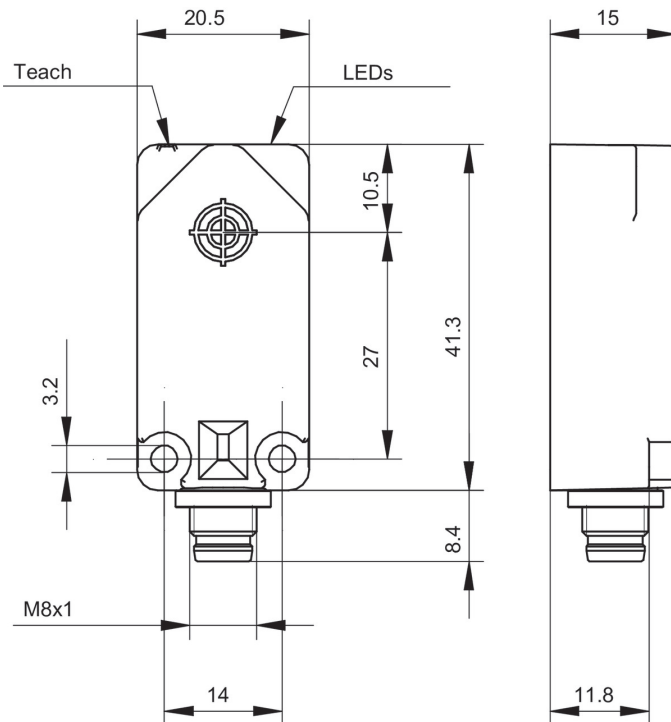

**Resolution**

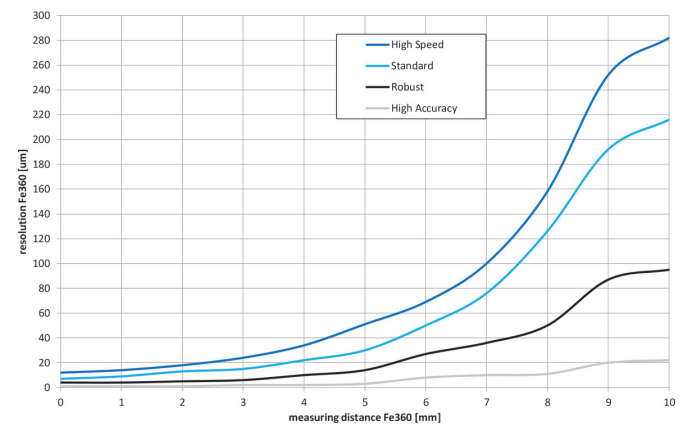

**Connection diagram**

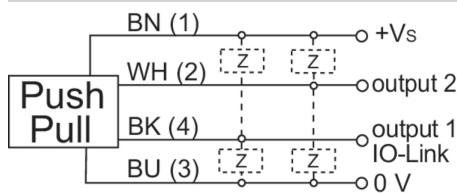

**Pin assignment**

