

## Overview

- 4 mm
- NPN break function (NC)
- connector M12
- -25 ... 75 °C
- IP 67



*Picture similar*



## Technical data

### General data

Mounting type	Flush
Nominal sensing distance S <sub>n</sub>	4 mm
Hysteresis	3 ... 20 % of S <sub>r</sub>
Output indicator	3 port LED red

### Electrical data

Switching frequency	< 2 kHz
Voltage supply range +V <sub>s</sub>	6 ... 36 VDC
Current consumption max. (no load)	10 mA
Output circuit	NPN break function (NC)
Voltage drop V <sub>d</sub>	< 2 VDC
Output current	< 200 mA

### Electrical data

Short circuit protection	Yes
Reverse polarity protection	Yes


### Mechanical data

Type	Cylindrical threaded
Material (sensing face)	PBT
Housing material	Brass nickel plated
Dimension	12 mm
Housing length	40,4 mm
Connection types	Connector M12
Tightening torque max.	15 Nm (Front: 10 Nm)

### Ambient conditions

Operating temperature	-25 ... +75 °C
Protection class	IP 67

### Dimension drawing

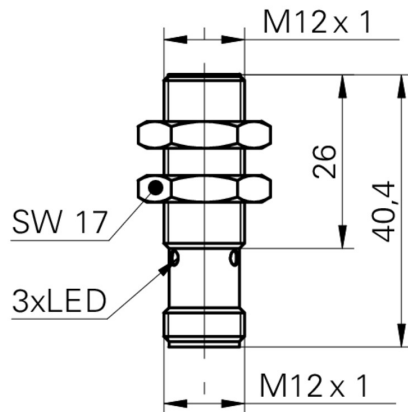

### Connection diagram

