

OHDM 20P6990/S14C

Diffuse sensors with background suppression - standard

Article number: 10153490

Overview

- background suppression
- 210 ... 1500 mm
- pulsed red laser diode
- PNP
- Teach-in
- connector M12 5 pin
- 50 °C
- IP 67



Picture similar



Technical data


| General data | | Electrical data | |
|------------------------------------|------------------------|-----------------------------|----------------------|
| Type | Background suppression | Voltage drop Vd | < 5 VDC |
| Light source | Pulsed red laser diode | Output function | Light / dark operate |
| Sensing distance Tw | 210 ... 1500 mm | Output circuit | PNP |
| Sensing range Tb (at Tw max.) | 200 ... 1500 mm | Output current | < 20 mA |
| Sensing range Tb (at Tw min.) | 200 ... 210 mm | Short circuit protection | Yes |
| Power on indication | LED green | Reverse polarity protection | Yes, Vs to GND |
| Light indicator | LED red | Mechanical data | |
| Sensing distance adjustment | Teach-in | Width / diameter | 20,6 mm |
| Laser class | 2 | Height / length | 65 mm |
| Wave length | 650 nm | Depth | 50 mm |
| Beam diameter | 2 mm | Type | Rectangular |
| Electrical data | | Housing material | Die-cast zinc |
| Response time | < 6 ms | Front (optics) | Glass |
| Release time | < 18 ms | Connection types | Connector M12 5 pin |
| Voltage supply range +Vs | 12 ... 28 VDC | Ambient conditions | |
| Current consumption max. (no load) | 100 mA | Operating temperature | 0 ... +50 °C |
| | | Protection class | IP 67 |

OHDM 20P6990/S14C


Diffuse sensors with background suppression - standard

Article number: 10153490

Dimension drawing

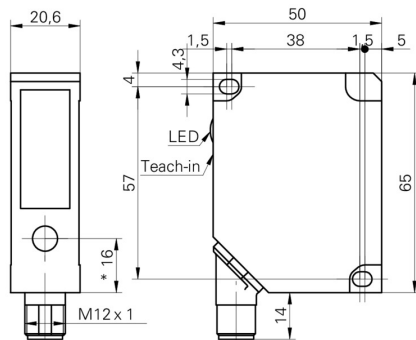

Connection diagram

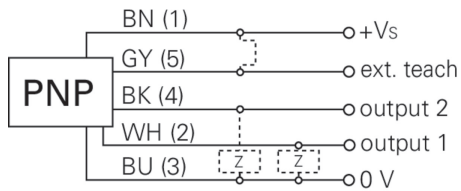

Laser warning



LASER RADIATION
DO NOT STARE INTO BEAM
Wavelength: 640...670nm
IEC 60825-1, Ed. 3, 2014
CLASS 2 LASER PRODUCT

IEC 60825-1/2014 Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019