

PBMN high pressure

Pressure transmitter for industrial high pressure applications

PBMN-2####R#####4#00##

Overview

- Precision measurement from 60 to 1600 bar
- Excellent temperature stability
- Robust stainless steel housing
- Dry measuring cell
- ATEX approval
- Relative pressure measurement



Technical data

Performance characteristics

Pressure type	Relative (gauged)
Compensated temperature range	-40 ... 85 °C
Long term stability	≤ 0.1 % FSR/a
Max. measuring error	± 0.1 % FSR ± 0.25 % FSR ± 0.5 % FSR Including zero-point and span error, non-linearity (by terminal base line), hysteresis and non-repeatability (EN 61298-2) For turndown, multiply this value by the applied turndown ratio
Max. measuring span	1600 bar
Max. turndown ratio	5 : 1
Measuring range	0 ... 1600 bar
Standard error of measurement (BFSL)	0.04 % FSR 0.1 % FSR 0.2 % FSR Including non-linearity, hysteresis and non-repeatability according BFSL For turndown, multiply this value by the applied turndown ratio
Min. measuring span	60 bar
Rise time (10 ... 90 %)	≤ 5 ms
Temperature coefficient	≤ 0.03 % FSR/10 K, measuring span ≤ 0.03 % FSR/10 K, zero point

Process conditions

Process temperature	-40 ... 120 °C
Process pressure	Refer to section "Operating conditions"

Process connection

Connection variants	Refer to section "Dimensional drawings"
Wetted parts material	AISI 304 (1.4301)

Process connection

Wetted parts material, membrane	AISI 630 (1.4542)
Wetted parts material, gas-ket	FKM (Viton®), optional FKM (Viton®) gaskets require a minimum ambient temperature of -20 °C and a minimum medium temperature of -25 °C NBR, optional

Ambient conditions

Operating temperature range	-40 ... 85 °C
Storage temperature range	-40 ... 85 °C
Degree of protection (EN 60529)	IP 65, with connector DIN EN 175301-803 A (DIN 43650 A), 4-pin IP 67, with cable outlet IP 67, with connector M12-A, 4-pin
Insulation resistance	> 100 MΩ, 500 V DC
Shock (EN 60068-2-27)	50 g / 11 ms, 100 g / 6 ms, 10 impulses per axis and direction
Vibration (sinusoidal) (EN 60068-2-6)	1.5 mm p-p (10 ... 58 Hz), 10 g (58 Hz ... 2 kHz), 10 cycles (2.5 h) per axis
Vibration, broad-band random (EN 60068-2-64)	0.1 g ² / Hz, > 10 gRMS (20 Hz ... 1 kHz), 30 min. per axis

Output signal

Current output	4 ... 20 mA, 2-wire 20 ... 4 mA, 2-wire
Voltage output	0 ... 10 V, 3-wire 0 ... 5 V, 3-wire 0.5 ... 4.5 V, 3-wire 1 ... 5 V, 3-wire 10 ... 0 V, 3-wire
Load resistance	≥ 5 kΩ
Short circuit protection	Yes
Shunt resistance	Rs ≤ (Vs - 8 V)/0.0205 A Rs ≤ 750 Ω, Vs = 24 V

PBMN high pressure

Pressure transmitter for industrial high pressure applications

PBMN-2####R#####4#00##

Technical data

Housing

Style	Compact transmitter
Overall size	Refer to section "Dimensional drawings"
Material	AISI 316L (1.4404)

Electrical connection

Connector	DIN EN 175301-803 A (DIN 43650 A), 4-pin M12-A, 4-pin
Cable outlet	1.5 m, 3-wire, shielded

Power supply

Voltage supply range	13 ... 30 V DC , with voltage output 8 ... 30 V DC , with current output
----------------------	---

ATEX II 1/2G Ex ia IIC T4/T6 Ga/Gb

Please note	For the application in Ex zone you have to respect the conditions mentioned in the ATEX Type Examination Certificate (SEV 11 ATEX 0129). You will find the relevant certificates and instructions at www.baumer.com
-------------	---

Maximum values for barrier selection, Ui	30 V DC , max.
--	----------------

Maximum values for barrier selection, Ii	100 mA
--	--------

Maximum values for barrier selection, Pi	750 mW
--	--------

Internal capacitance, Ci	31 nF
--------------------------	-------

Internal inductance, Li	3 µH
-------------------------	------

ATEX II 1D Ex ia IIIC T (200) 107°C IP6X Da

Please note	For the application in Ex zone you have to respect the conditions mentioned in the ATEX Type Examination Certificate (SEV 11 ATEX 0129). You will find the relevant certificates and instructions at www.baumer.com
-------------	---

ATEX II 1D Ex ia IIIC T (200) 107°C IP6X Da

Voltage supply range, Un	30 V DC , max.
--------------------------	----------------

Degree of protection for cable accessories	IP 65
--	-------

ATEX II 1G Ex ia IIC T4/T6 Ga

Please note	For the application in Ex zone you have to respect the conditions mentioned in the ATEX Type Examination Certificate (SEV 11 ATEX 0129). You will find the relevant certificates and instructions at www.baumer.com
-------------	---

Maximum values for barrier selection, Ui	30 V DC , max.
--	----------------

Maximum values for barrier selection, Ii	100 mA
--	--------

Maximum values for barrier selection, Pi	750 mW
--	--------

Internal capacitance, Ci	31 nF
--------------------------	-------

Internal inductance, Li	3 µH
-------------------------	------

Compliance and approvals

EMC	EN 61000-6-2 EN 61000-6-3 EN 61326-2-3
-----	--

Explosion protection	ATEX II 1/2G Ex ia IIC T4/T6 Ga/Gb ATEX II 1D Ex ia IIIC T (200) 107 °C IP6X Da ATEX II 1G Ex ia IIC T4/T6 Ga
----------------------	---

Operating conditions

Measuring range (bar)	Proof pressure (bar)	Burst Pressure (bar)
0 ... 60	120	480
0 ... 100	200	800
0 ... 160	320	1280
0 ... 250	500	2000
0 ... 400	800	3200
0 ... 600	1200	4000
0 ... 1000	2000	4000
0 ... 1600	3200	4000


PBMN high pressure

Pressure transmitter for industrial high pressure applications


PBMN-2####R#####4#00##

Dimensional drawings (mm)


Housing



Housing with connector M12-A, 4-pin

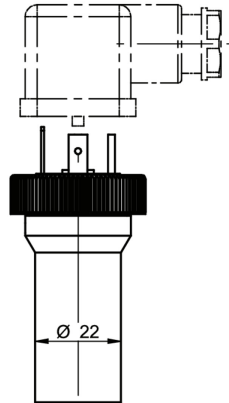


Housing with connector DIN EN 175301-803 A (DIN 43650 A), 4-pin

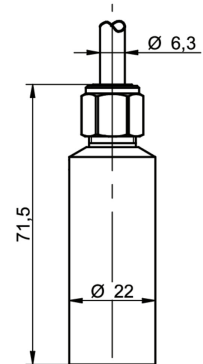


Housing with cable outlet, 3-wire, 1.5 m length


Process connection




G30-02
G 1/4 B EN 837-1 (BCID: G30)




G31-03
G 1/2 B EN 837-1 (BCID: G31)




N01-04
1/4-18 NPT (BCID: N01)



N02-05
1/2-14 NPT (BCID: N02)



G50-06
G 1/4 A DIN 3852-E (BCID: G50)



M05-08
M14 x 1.5, cone 60° (BCID: M05)


PBMN high pressure

Pressure transmitter for industrial high pressure applications


PBMN-2####R#####4#00##

Dimensional drawings (mm)

Process connection



G51-09
G 1/2 A DIN 3852-E (BCID: G51)



G21-12
G 1/4 A ISO 228-1 female thread (BCID: G21)

Electrical connection

Output signal	Equivalent circuit	Electrical connection	Function	Pin assignment
4 ... 20 mA (2-wire)			+Vs	1
			Iout	3
			Frame Ground	Plug thread
			n.c.	2, 4
			+Vs	1
			Iout	2
0 ... 10 V (3-wire)			Frame Ground	Plug thread
			+Vs	1
			Uout	2, 4
			GND (0 V)	3
			Frame Ground	Plug thread
			+Vs	1
			Uout	3
			GND (0 V)	2
			Frame Ground	Grounding lug
			+Vs	RD
			Uout	WH
			GND (0 V)	BU
			Frame Ground	Shield

Ordering information

Ordering key - Configuration possibilities see website

PBMN high pressure

Pressure transmitter for industrial high pressure applications

PBMN-2####R#####4#00##

Ordering information

Ordering key - Configuration possibilities see website

	PBMN	-	2	#	###	R	##	##	##	4	#	0	0	#	#
Product	PBMN														
Housing material															
Stainless steel 1.4404 AISI 316L			2												
Accuracy															
±0.5 % FS				3											
±0.25 % FS				4											
±0.10 % FS				5											
Measuring range															
0 ... 60 bar (EN)					B29										
0 ... 100 bar (EN)					B31										
0 ... 160 bar (EN)					B33										
0...200 bar (EN)					B34										
0 ... 250 bar (EN)					B35										
0 ... 400 bar (EN)					B38										
0...600 bar (EN)					B39										
0...1000 bar (EN)					B41										
0...1600 bar (EN)					B42										
0...1000 psi (ANSI)					H30										
0...1500 psi (ANSI)					H31										
0...3000 psi (ANSI)					H34										
0...6000 psi (ANSI)					H38										
0...9000 psi (ANSI)					H39										
0...15000 psi (ANSI)					H41										
0...20000 psi (ANSI)					H42										
Kind of pressure															
Relative (gauged)						R									
Output signal															
20...4 mA							A0								
4...20 mA							A1								
0...10 V							A2								
1...5 V							A3								
0...5 V							A4								
0.5...4.5 V							A5								
10...0 V							A7								
Output Connection															
M12-A, 4-pin								14							
DIN EN 175301-803 A (DIN 43650 A), 4-pin								44							
Cable outlet 1.5 m, 3-wire, shielded								53							

PBMN high pressure

Pressure transmitter for industrial high pressure applications

PBMN-2####R#####4#00##

Ordering information

Ordering key - Configuration possibilities see website

	PBMN	-	2	#	###	R	##	##	##	4	#	0	0	#	#
Process connection															
G 1/4 B EN 837-1 (G30)										02					
G 1/2 B EN 837-1 (G31)										03					
1/4-18 NPT (N01)										04					
1/2-14 NPT (N02)										05					
G 1/4 A DIN 3852-E (G50)										06					
M20 x 1.5 ISO 261 / ISO 965 (M08)										07					
M14 x 1.5, cone 60° (M05)										08					
G 1/2 A DIN 3852-E (G51)										09					
G 1/4 A ISO 228-1 female thread (G21)										12					
G 1/4 B EN 837-1 with integrated damping element (P ≤ 600 bar) (G30)										22					
G 1/2 B EN 837-1 with integrated damping element (P ≤ 600 bar) (G31)										23					
1/4-18 NPT with integrated damping element (P ≤ 1000 bar) (N01)										24					
1/2-14 NPT with integrated damping element (P ≤ 1000 bar) (N02)										25					
G 1/4 A DIN 3852-E, pressure channel 0.6 mm (G50)										26					
G 1/2 A DIN 3852-E with integrated damping element (P ≤ 600 bar) (G51)										29					
Process connection material															
Stainless steel 1.4301 AISI 304										4					
Seal															
None												0			
NBR standard												1			
FKM (Viton®)												3			
Oil filling															
Without												0			
Display															
Without display													0		
ATEX															
Standard safety														0	
ATEX according to SEV 11 ATEX 0129														1	
Approvals															
Standard approvals															0
EAC															7