

Absolute encoders - SSI

Ex approval Ex II 2D/2G (ATEX)

Optical multiturn encoders

Multiturn 13 bit ST / 12 bit MT

X 700 - SSI - Multiturn



X 700 with clamping flange

Features

- Encoder multiturn / SSI / ATEX
- Optical sensing method
- Resolution: multiturn 13 + 12 bit
- Clamping flange with solid shaft $\varnothing 10$ mm
- Explosion protection per Ex II 2D/2G (ATEX)
- Device class 2 / zone 1 (gas), zone 21 (dust)
- Electronic setting of zero point
- Counting direction input
- Maximum resistant against magnetic fields

Technical data - electrical ratings

Voltage supply	10...30 VDC 5 VDC ± 10 %
Reverse polarity protection	Yes
Consumption w/o load	≤ 50 mA (24 VDC)
Initializing time typ.	20 ms after power on
Interface	SSI
Function	Multiturn
Steps per revolution	16384 / 14 bit
Number of revolutions	4096 / 12 bit
Absolute accuracy	$\pm 0.025^\circ$
Sensing method	Optical
Code	Gray or binary
Code sequence	CW/CCW coded by connection
Inputs	SSI clock Control signals UP/DOWN inv. and zero
Output stages	SSI data: Linedriver RS422 Diagnostic outputs push-pull
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-4
Diagnostic functions	Self-diagnosis Multiturn sensing

Technical data - mechanical design

Size (flange)	$\varnothing 70$ mm
Shaft type	$\varnothing 10$ mm solid shaft (clamping flange)
Flange	Clamping flange
Protection DIN EN 60529	IP 67
Operating speed	≤ 6000 rpm (mechanical) ≤ 6000 rpm (electric)
Starting acceleration	≤ 1000 U/s ²
Starting torque	≤ 0.4 Nm (+25 °C)
Admitted shaft load	≤ 60 N axial ≤ 50 N radial
Materials	Housing: stainless steel Flange: stainless steel
Operating temperature	-20...+70 °C
Relative humidity	95 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration ± 0.75 mm - 10-58 Hz 10 g - 58-2000 Hz DIN EN 60068-2-27 Shock 200 g, 6 ms
Explosion protection	Ex II 2G Ex d IIC T6 Ex II 2D
Weight approx.	1300 g
Connection	Cable

Absolute encoders - SSI

Ex approval Ex II 2D/2G (ATEX)

Optical multiturn encoders

Multiturn 13 bit ST / 12 bit MT

X 700 - SSI - Multiturn

Part number

X 700. **M** **1** **02**

Connection

- 12 Cable 2 m, axial
- 14 Cable 5 m, axial
- 16 Cable 10 m, axial
- 19 Cable 20 m, axial
- 21 Cable 70 m, axial
- 22 Cable 6 m, axial
- 23 Cable 40 m, axial

Voltage supply / signals

- 1 10...30 VDC / gray code 13 + 12 bit
- 2 10...30 VDC / binary code 13 + 12 bit
- 4 10...30 VDC / gray code 12 + 12 bit
- 5 5 VDC / binary code 12 + 12 bit


Flange / Solid shaft

- 1 Clamping flange / ø10 mm, IP 67

Design

M Multiturn

Data transfer

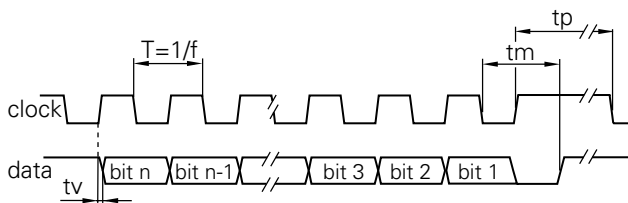

Clock frequency f	62.5...1500 kHz
Duty cycle of T	40...60 %
Delay time t_v	150 ns
Monoflop time t_m	$26\ \mu s + T/2$
Clock interval t_p	30 μs

Absolute encoders - SSI

Ex approval Ex II 2D/2G (ATEX)

Optical multiturn encoders

Multiturn 13 bit ST / 12 bit MT

X 700 - SSI - Multiturn

Terminal significance	
UB	Encoder voltage supply.
GND	Encoder ground connection relating to UB.
Data+	Positive, serial data output of differential linedriver.
Data-	Negative, serial data output of differential linedriver.
Clock+	Positive SSI clock input. Clock+ together with clock- forms a current loop. A current of approx. 7 mA towards clock+ input means logic 1 in positive logic.
Clock-	Negative SSI clock input. Clock- together with clock+ forms a current loop. A current of approx. 7 mA towards clock- input means logic 0 in positive logic.
Zero setting	Input for setting a zero point anywhere within the programmed encoder resolution. The zero setting operation is triggered by a High impulse and has to be in line with the selected direction of rotation (UP/DOWN). Connect to GND after setting operation for maximum interference immunity. Impulse duration >100 ms.
$\overline{\text{DATAVALID}}$	Diagnostic output. An error warning is given at level Low. Important: Interferences must be drained by the downstream electronics.
$\overline{\text{DATAVALID MT}}$	Diagnostic output for monitoring the multiturn sensor voltage supply. Upon dropping below a defined voltage level the $\overline{\text{DV MT}}$ output is switched to Low.
$\overline{\text{UP/DOWN}}$	$\overline{\text{UP/DOWN}}$ counting direction input. This input is standard on High. $\overline{\text{UP/DOWN}}$ means ascending output data with clockwise shaft rotation when looking at flange. $\overline{\text{UP/DOWN}}$ -Low means ascending values with counterclockwise shaft rotation when looking at flange.

Terminal assignment	
Core colour	Assignment
brown	UB
white	GND
green	Clock+
grey	Data+
blue	Zero setting
pink	Data-
yellow	Clock-
black	$\overline{\text{DATAVALID}}$
red	$\overline{\text{UP/DOWN}}$
violet	$\overline{\text{DATAVALID MT}}$

Trigger level	
SSI	Circuit
SSI-Clock	Optocoupler, RS422 with terminating resistor
SSI-Data	Linedriver RS422 or RS485

Control inputs	Input circuit
Input level High	>0.7 UB
Input level Low	<0.3 UB
Input resistance	10 k Ω

Diagnostic outputs	Output circuit Push-pull circuit-proof
Output level High	>UB -3.5 V (I = -20 mA)
Output level Low	<0.5 V (I = 20 mA)
Load High / Low	<20 mA

Absolute encoders - SSI


Ex approval Ex II 2D/2G (ATEX)

Optical multiturn encoders

Multiturn 13 bit ST / 12 bit MT

X 700 - SSI - Multiturn

Dimensions

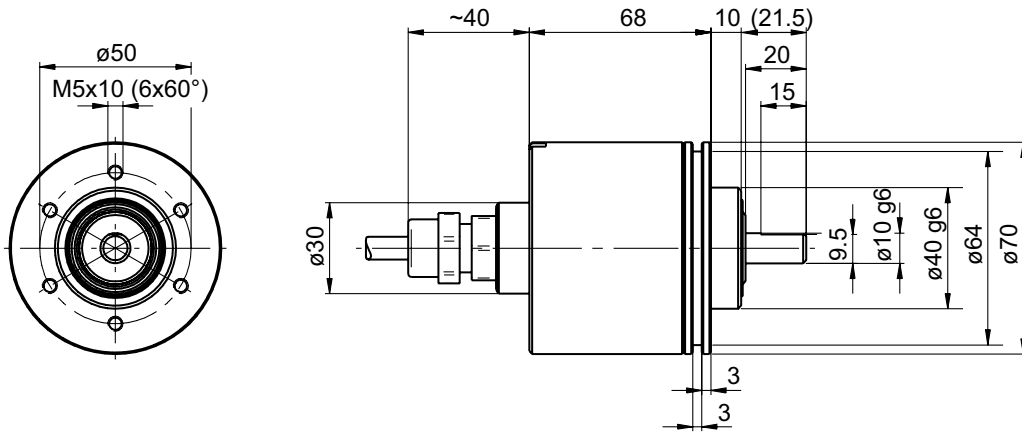

Absolute encoders - SSI

Ex approval Ex II 2D/2G (ATEX)

Optical multiturn encoders

Multiturn 13 bit ST / 12 bit MT

X 700 - SSI - Multiturn

Checklist for EX protection data collection

For the design of explosion-proof encoders of the IX700 or AX700 series according to EU Directive 2014/34/EU, it is absolutely necessary to complete this checklist in order to be able to resolve all open questions regarding explosion protection and application conscientiously.

Company: _____

Address: _____

Department: _____ Phone: _____

Clerck/Technician: _____

Email: _____

Responsibility:

The operator is responsible for maintaining the performance limit of the devices (see datasheet)

Equipment group:			Please select
Classification according to ATEX 2021/34/EU	Equipment group I	Mining M2	
	Equipment group II	Explosive Atmosphere	
Classification according to IEC 60079	Equipment group I	Mining M2	
	Equipment group II	Gas hazardous areas	
	Equipment group III	Dust hazardous areas	

Equipment Use / Field Application: (i.e.: paint line, process engineering, gas storage etc.)

X 700 - Incremental			
Ambient temperature range	Temperature class	max. surface temperature on the housing	Enter value
-20°C bis +55°C	T6	+85°C	
-20°C bis +105°C	T4	+135°C	
dust: -20°C bis +45°C	T70		

X 700 - Absolute			
Ambient temperature range	Temperature class	max. surface temperature on the housing	Enter value
-20°C bis +65°C	T6	+85°C	
-20°C bis +115°C	T4	+135°C	
Dust: -20°C bis +55°C	T70		

Mechanical load			Enter values
Numbers of revolutions:	RMP	max. 3000 rpm	
Axial shaft load:	(N)		
Radial shaft load:	(N)		
Environmental influences (salt, alkalis, etc.):			

Date:	Stamp:
Signature:	

Internal information (to be filled in by Baumer)

Baumer order number:

Baumer production order number