

Acceleration sensors

With SIL2/PLd relay output for limit monitoring
Analog / CANopen®

GAM900S



Features

- Acceleration sensor for safety applications
- Safety limit monitoring with relay output according to SIL2/PLd
- Output of acceleration via analog / CANopen®
- Redundant 3 axes detection, MEMS based
- Measuring range ± 2 g
- Connection: connector M12
- Offshore capability

GAM900S

Technical data - electrical ratings

| | |
|-----------------------------|---|
| Voltage supply | 10...30 VDC |
| Reverse polarity protection | Yes |
| Consumption w/o load | ≤ 200 mA (24 VDC) |
| Initializing time | ≤ 2000 ms after power on |
| Interfaces | CANopen®, Analog 4...20 mA (0...10 V optional) |
| Frequency bands | 4 (configurable) |
| Measuring range | ± 2 g |
| Resolution | < 4 mg |
| Accuracy 3σ | =60 mg (in the range of ± 1000 mg) =15 mg (in the range of ± 250 mg) (with band pass filtering, to -1 dB) |
| Interference immunity | DIN EN 61000-6-2 DIN EN 61326-3-1 |
| Emitted interference | DIN EN 61000-6-4 |
| Status indicator | DUO-LED integrated in housing |
| Approvals | UL approval / E63076, PLd according to EN ISO 13849-1:2008+AC:2009 SIL CL2 according to EN 62061:2005 +AC:2010 +A1:2013 SIL2 according to IEC 61508-1..7:2010, Certified by TÜV Rheinland |

Technical data - mechanical design

| | |
|-------------------------|--|
| Dimensions W x H x L | 55 x 30 x 90 mm |
| Protection DIN EN 60529 | IP 55 |
| Materials | Aluminium |
| Operating temperature | -40...+75 °C |
| Resistance | DIN EN 60068-2-6 Vibration 20 g, 60-2000 Hz DIN EN 60068-2-27 Shock 100 g, 6 ms |
| Weight approx. | 250 g |
| Connection | Connector M12 |

Safety-relevant key characteristics

| | |
|---|----------------|
| Performance Level (ISO 13849) | PLd |
| Category (ISO 13849) | 3 |
| MTTF _d (ISO 13849) | 393 years |
| DC _{avg} (ISO 13849) | 86 % |
| TM (service life, ISO 13849) | 20 years |
| Safety Integrity Level (IEC 61508 / EN 62061) | SIL2 / SIL CL2 |
| PFH _D (IEC 61508 / EN 62061) | 2,5 E-09 1/h |
| PFD _{avg} (IEC 61508) | 2,1 E-04 |
| Error reaction time | < 50 ms |

Acceleration sensors

With SIL2/PLd relay output for limit monitoring

Analog / CANopen®

GAM900S

Part number

GAM900S - 12-pin

GAM900S-

| | | | | | | | |
|--|---|----|---|--|------|-----|--|
| | 3 | 2G | . | | .ACB | ... | |
|--|---|----|---|--|------|-----|--|

| | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | |
| <u>Option terminal assignment (at connection -2)</u> | | | | | | | | | | |
| - | | | | | | | | | | |
| No options | | | | | | | | | | |
| /3500 Voltage supply and redundant safety relay at connector 2 | | | | | | | | | | |
| /3501 Safety relay parallel at connector 1 and 2 | | | | | | | | | | |
| /3502 Voltage supply at connector 2 | | | | | | | | | | |
| <u>Relay trigger threshold</u> | | | | | | | | | | |
| ... Encoding value 05...99 at choice | | | | | | | | | | |
| Trigger threshold = encoding value x 10 mg | | | | | | | | | | |
| (e.g. 80 mg = 08 x 10 mg) | | | | | | | | | | |
| Encoding value 00: at ≥2 different switching threshold | | | | | | | | | | |
| <u>Voltage supply / interface</u> | | | | | | | | | | |
| CC 10...30 VDC / CANopen® and analog (4...20 mA) | | | | | | | | | | |
| VC 10...30 VDC / CANopen® and analog (0...+10 V)* | | | | | | | | | | |
| <u>Connection / Output</u> | | | | | | | | | | |
| J 1 x M12 connector, 12-pin / 1 x relay | | | | | | | | | | |
| 2 2 x M12 connector, 12-pin / 4 x relay | | | | | | | | | | |
| <u>Measuring range</u> | | | | | | | | | | |
| 2G ±2 g | | | | | | | | | | |
| <u>Number of axes</u> | | | | | | | | | | |
| 3 Three axes | | | | | | | | | | |
| <u>Housing material</u> | | | | | | | | | | |
| M Aluminium | | | | | | | | | | |

* On request

Accessories

Connectors and cables

| | |
|----------|--|
| 11142900 | Female connector M12, 12-pin, 1 m cable (Z 201.M01) |
| 11138627 | Female connector M12, 12-pin, 5 m cable (Z 201.M05) |
| 11142902 | Female connector M12, 12-pin, 10 m cable (Z 201.M10) |

Note: Accessories are not SIL2 approved. The user has to ensure the secure transfer and analysis of the signal.

Acceleration sensors

With SIL2/PLd relay output for limit monitoring

Analog / CANopen®


GAM900S

Part number

GAM900S - 5-pin

GAM900S-

| | | | | | | | |
|---|---|----|---|---|----|------|-----|
| M | 3 | 2G | . | B | 0C | .ACB | ... |
|---|---|----|---|---|----|------|-----|

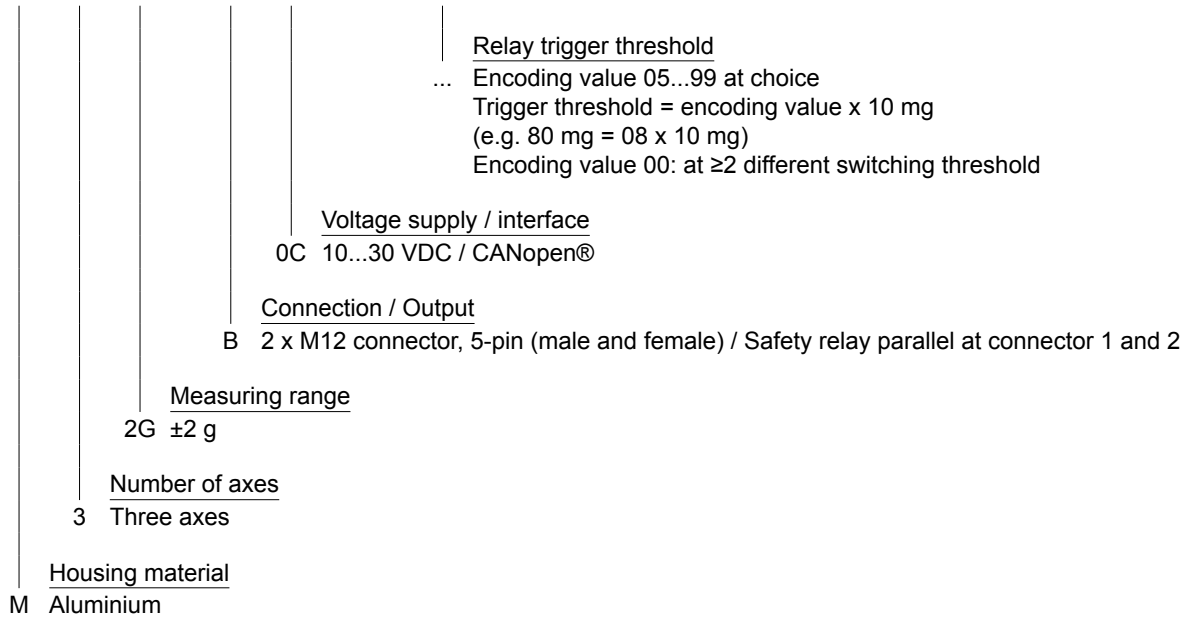

Acceleration sensors

With SIL2/PLd relay output for limit monitoring


Analog / CANopen®

GAM900S


Terminal assignment

Standard / no option, connector M12, 12-pin

Connector 1




| Pin | Description |
|-----|------------------------------|
| 1 | GND |
| 2 | Test input (max. 30 V) |
| 3 | UB |
| 4 | Analog Ground |
| 5 | Analog output X |
| 6 | Analog output Y |
| 7 | Relay 1 / Safety contact NO* |
| 8 | CAN Ground |
| 9 | Relay 1 / Safety contact CO* |
| 10 | n.c. |
| 11 | CAN Low |
| 12 | CAN High |



Connector 1


Standard / no option, connector 2 x M12, 12-pin

Connector 1




| Pin | Description |
|-----|------------------------------|
| 1 | GND |
| 2 | Test input (max. 30 V) |
| 3 | UB |
| 4 | Analog Ground |
| 5 | Analog output X |
| 6 | Analog output Y |
| 7 | Relay 1 / Safety contact NO* |
| 8 | CAN Ground |
| 9 | Relay 1 / Safety contact CO* |
| 10 | Relay 1 / Contact NC* |
| 11 | CAN Low |
| 12 | CAN High |

Connector 2



| Pin | Description |
|-----|-----------------------|
| 1 | Relay 2 / Contact CO* |
| 2 | Relay 3 / Contact NO* |
| 3 | Relay 3 / Contact CO* |
| 4 | Relay 3 / Contact NC* |
| 5 | Relay 4 / Contact NO* |
| 6 | Relay 4 / Contact CO* |
| 7 | Relay 4 / Contact NC* |
| 8 | CAN Ground |
| 9 | Relay 2 / Contact NO* |
| 10 | Relay 2 / Contact NC* |
| 11 | CAN Low |
| 12 | CAN High |



Connector 1

Connector 2

* Customer-specific relay configuration on request

Acceleration sensors


With SIL2/PLd relay output for limit monitoring


Analog / CANopen®

GAM900S


Terminal assignment


Option -3500, connector 2 x M12, 12-pin / Voltage supply and redundant safety relay at connector 2

| Connector 1 | Pin | Description |
|---|-----|------------------------------|
|  | 1 | GND |
| | 2 | Test input (max. 30 V) |
| | 3 | UB |
| | 4 | Analog ground |
| | 5 | Analog output X |
| | 6 | Analog output Y |
| | 7 | Relay 1 / Safety contact NO* |
| | 8 | CAN Ground |
| | 9 | Relay 1 / Safety contact CO* |
| | 10 | Relay 1 / Contact NC* |
| | 11 | CAN Low |
| | 12 | CAN High |


| Connector 2 | Pin | Description |
|--|-----|------------------------------|
|  | 1 | Relay 2 / Contact CO* |
| | 2 | Relay 1a / Safety contact NO |
| | 3 | Relay 1a / Safety contact CO |
| | 4 | Relay 1a / Contact NC |
| | 5 | n.c. |
| | 6 | GND |
| | 7 | UB |
| | 8 | CAN Ground |
| | 9 | Relay 2 / Contact NO* |
| | 10 | Relay 2 / Contact NC* |
| | 11 | CAN Low |
| | 12 | CAN High |


Option -3501, connector 2 x M12, 12-pin / Safety relay parallel at connector 1 and 2

| Connector 1 | Pin | Description |
|---|-----|------------------------------|
|  | 1 | GND |
| | 2 | Test input (max. 30 V) |
| | 3 | UB |
| | 4 | Analog ground |
| | 5 | Analog output X |
| | 6 | Analog output Y |
| | 7 | Relay 1 / Safety contact NO* |
| | 8 | CAN Ground |
| | 9 | Relay 1 / Safety contact CO* |
| | 10 | Relay 1 / Contact NC* |
| | 11 | CAN Low |
| | 12 | CAN High |

| Connector 2 | Pin | Description |
|--|-----|------------------------------|
|  | 1 | Relay 2 / Contact CO* |
| | 2 | Relay 1a / Safety contact NO |
| | 3 | Relay 1a / Safety contact CO |
| | 4 | Relay 1a / Contact NC |
| | 5 | Relay 4 / Contact NO* |
| | 6 | Relay 4 / Contact CO* |
| | 7 | Relay 4 / Contact NC* |
| | 8 | CAN Ground |
| | 9 | Relay 2 / Contact NO* |
| | 10 | Relay 2 / Contact NC* |
| | 11 | CAN Low |
| | 12 | CAN High |

Option -3502, connector 2 x M12, 12-pin / Voltage supply at connector 2

| Connector 1 | Pin | Description |
|---|-----|------------------------------|
|  | 1 | GND |
| | 2 | Test input (max. 30 V) |
| | 3 | UB |
| | 4 | Analog ground |
| | 5 | Analog output X |
| | 6 | Analog output Y |
| | 7 | Relay 1 / Safety contact NO* |
| | 8 | CAN Ground |
| | 9 | Relay 1 / Safety contact CO* |
| | 10 | n.c. |
| | 11 | CAN Low |
| | 12 | CAN High |

| Connector 2 | Pin | Description |
|--|-----|-----------------------|
|  | 1 | Relay 2 / Contact CO* |
| | 2 | Relay 3 / Contact NO* |
| | 3 | Relay 3 / Contact CO* |
| | 4 | Relay 3 / Contact NC* |
| | 5 | n.c. |
| | 6 | GND |
| | 7 | UB |
| | 8 | CAN Ground |
| | 9 | Relay 2 / Contact NO* |
| | 10 | Relay 2 / Contact NC* |
| | 11 | CAN Low |
| | 12 | CAN High |

* Customer-specific relay configuration on request

Acceleration sensors

With SIL2/PLd relay output for limit monitoring
Analog / CANopen®


GAM900S

Terminal assignment

Standard / no option, connector 2 x M12, 5-pin (A-coded)



Male

| Pin | Description |
|-----|------------------------------|
| 1 | Relay 1 / Safety contact CO* |
| 2 | Relay 1a / Safety contact CO |
| 3 | GND |
| 4 | Test input (max. 30 V) |
| 5 | UB |



Female

| Pin | Description |
|-----|------------------------------|
| 1 | Relay 1 / Safety contact NO* |
| 2 | Relay 1a / Safety contact NO |
| 3 | CAN GND |
| 4 | CAN High |
| 5 | CAN Low |



* Customer-specific relay configuration on request

Acceleration sensors

With SIL2/PLd relay output for limit monitoring

Analog / CANopen®


GAM900S

Configuration profile

| Band | Analog 1 CANopen 1 | Analog 2 CANopen 2 | CANopen 3 | CANopen 4 |
|--------------------|-----------------------|-----------------------|--------------|--------------|
| Direction | X | Y | Z | X,Y |
| Range Analog | ±0.5 g | ±0.5 g | – | – |
| Range CANopen | ±2 g | ±2 g | ±2 g | ±2 g |
| Resolution Analog | 0.244 mg | 0.244 mg | – | – |
| Resolution CANopen | 1 mg | 1 mg | 1 mg | 1 mg |
| Filter type | Bandpass | Bandpass | Bandpass | Bandpass |
| Filter order | 4 | 4 | 4 | 4 |
| Bandwidth | 0.05...10 Hz | 0.05...10 Hz | 0.05...10 Hz | 0.05...10 Hz |
| Relay ID | 2 | 2 | – | 1 (safety) |
| Relay attack value | see part no. | see part no. | – | see part no. |
| Relay attack time | 0 s | 0 s | – | 0 s |
| Relay decay value | 100 % | 100 % | – | 100 % |
| Relay decay time | 1 s | 1 s | – | 1 s |

Different configurations on request.

Installation position




Acceleration sensors

With SIL2/PLd relay output for limit monitoring
Analog / CANopen®

GAM900S

Dimensions

GAM900S - aluminium housing, 1x connector M12

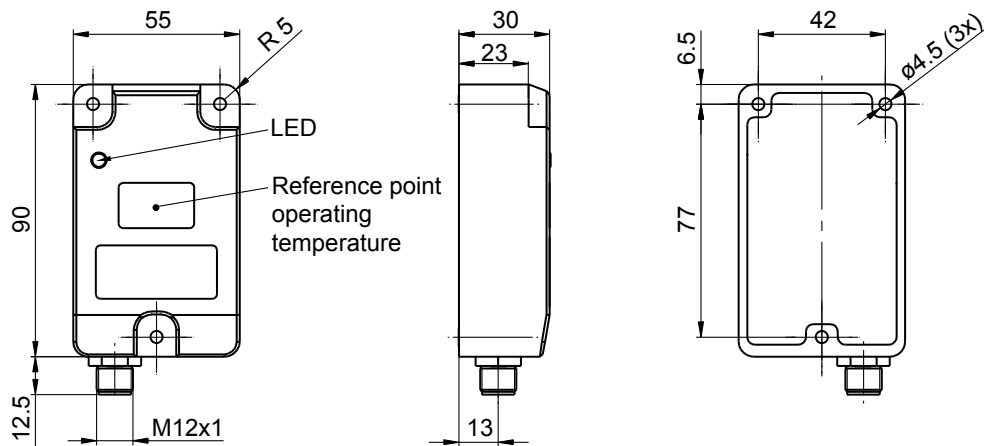

GAM900S - aluminium housing, 2x connector M12

