

2-dimensional, measuring range up to $\pm 90^\circ$ CANopen® / SAE J1939 / Analog

Overview

- Size 52 mm
- MEMS capacitive measuring principle
- E1 compliant design
- Interface CANopen®, SAE J1939, Analog
- Connection M12 and cable
- Protection up to IP 69K
- Applicable up to PLd (ISO 13849)



Technical data		
Technical data - electrical r	ratings	Techn
Voltage supply	836 VDC	MTTF
Reverse polarity protection	Yes	
Consumption w/o load	≤40 mA (24 VDC)	
Initializing time	≤ 0.5 s after power on	Progra
Interface	CANopen®	Fiogra
	SAE J1939 Analog (420 mA / 0.54.5 V / 05 V /	Diagno
	010 V)	Status
Load resistor	≥1 kΩ / voltage output	Approv
	≤800 Ω / current output	Techn
Measuring range	±10°/±30°/±45°/±60°/±90°	Dimen
Resolution	0.01 ° CANopen®	Protec
	0.01 ° SAE J1939	
Accuracy (125 °C)	12 bit Analog	
Accuracy (+25 °C)	Typ. ±0.1° 0.008 °/K	Materia
Temperature coefficient		Corros
Cross-axis-sensitivity typ.	0.3 % (see general information)	001103
Repeatability	± 0.1 ° (+25 °C)	
Sensing rate	1600 Hz	Opera
Limit frequency	0.125 Hz, 2. order / low-pass filter (Default: 5 Hz)	Resist
Interference immunity	EN 61000-6-2	
	ECE Reg. No. 10R04 ISO 7637-2	
	ISO 11452-2 / ISO 11452-5	Weigh
Emitted interference	EN 61000-6-4	Conne
	ECE Reg. No. 10R04	
	ISO 7637-2 / EN 55025	

Technical data - electrical ra	atings
MTTF _d (ISO 13849)	High (>100 years) Use in safety functions exclusively based on Application Note and MTTFd reliability prediction (request separately).
Programmable parameters	Preset and offset Filter
Diagnostic function	Parameter error
Status indicator	DUO-LED integrated in housing
Approval	UL approval / E63076
Technical data - mechanica	l design
Dimensions W x H x L	48 x 24 x 52 mm
Protection EN 60529	IP 66 IP 67 IP 68 IP 69K
Material	Housing: aluminium, coated
Corrosion protection	IEC 60068-2-52 Salt mist for ambient conditions CX (C5-M) accord- ing to ISO 12944-2
Operating temperature	-40+85 °C (see general information)
Resistance	EN 60068-2-6 Vibration 20 g, 60-2000 Hz EN 60068-2-27 Shock 200 g, 6 ms
Weight approx.	95 g
Connection	Flange connector M12, 8-pin Flange connector M12, 5-pin Cable 1 m

Optional

- With integrated terminating resistor
- Connection with DEUTSCH connector
- Output signal with out-of-range diagnostics

2-dimensional, measuring range up to ±90° CANopen® / SAE J1939 / Analog

General information

Self-heating correlated to installation and ambient conditions as well as to electronics and supply voltage must be considered for precise thermal dimensioning. The inclination sensor is supposed to self-heating to approximately 5 K when attached to a varnished ground metal. Operating the inclination sensor close to the maximum limits requires measuring the currently prevailing temperature at the housing. Vibration with frequency in the range of 1600 Hz acting on the sensor leads to reduced measuring accuracy. Teach/preset of zero position outside a range of $\pm 5^{\circ}$ around factory settings of zero position (inclination 0°) can lead to reduced measuring accuracy. Specified cross-sensitivity is valid for reference mounting.

Installation position



Horizontal installation

When installing the 2-dimensional inclination sensor with the housing in horizontal position, make sure the base plate is aligned parallel to the horizontal line.

The sensor can be inclined both towards the X and the Y axis. There is one measured value supplied for each axis. Sensor default is 2-dimensional measuring within the selected range, e.g. $\pm 30^{\circ}$. Zero-crossing is exactly in the horizontal line.







Vertical installation

When installing the 2-dimensional inclination sensor with the housing in vertical position, make sure the base plate is aligned parallel to the vertical line. The sensor can be inclined both towards the X and the Y axis. There is one measured value supplied for each axis.

Sensor default is 2-dimensional measuring within the selected range, e.g. $\pm 30^{\circ}$. Zero-crossing is exactly in the vertical line.









Page 2 of 7

2-dimensional, measuring range up to ±90° CANopen® / SAE J1939 / Analog

Terminal assignment							
Analog –	Analog – M12 flange connector, 8-pin						
Pin	Assignment	Description					
1	+Vs	Voltage supply					
2	GND	Ground connection relating to +Vs					
3	OUT_X	Output					
4	OUT_Y	Output					
5	Teach ¹⁾	Teach-Input					
6	d.u.	Do not use					
7	d.u.	Do not use					
8	A_GND	Ground connection relating to analog					
5 4 6 8 9	3	M12 flange connector (male), A-coded					

	CANoper	n® / SAEJ1939	- 2xM12 flange connector, 5-pin
	Pin	Assignment	Description
	1	CAN_GND	Ground connection relating to CA
+Vs	2	+Vs	Voltage supply
	3	GND	Ground connection relating to +V
	4	CAN_H	CAN Bus Signal (dominant High)
	5	CAN_L	CAN Bus Signal (dominant Low)
analog	5 3	$2 2 \circ \circ \circ 4$	M12 flange connector (male / fem A-coded
			nificance are internally connected a load on the internal terminal conne

M12 flange connector (male / female),

Ground connection relating to CAN

Terminals of the same significance are internally connected and identical in their functions. Max. load on the internal terminal connections Vs-Vs and GND-GND is 1 A each.

Analog - cable

Core color	Assignment	Description
White	+Vs	Voltage supply
Brown	GND	Ground connection relating to +Vs
Green	OUT_X	Output
Yellow	OUT_Y	Output
Grey	Teach ¹⁾	Teach-Input
Pink	d.u.	Do not use
Blue	d.u.	Do not use
Red	A_GND	Ground connection relating to analog

¹⁾ Function zero setting See description zero setting

CANopen® / SAEJ1939 - M12 flange connector, 5-pin

•		
Pin	Assignment	Description
1	CAN_GND	Ground connection relating to CAN
2	+Vs	Voltage supply
3	GND	Ground connection relating to +Vs
4	CAN_H	CAN Bus Signal (dominant High)
5	CAN_L	CAN Bus Signal (dominant Low)
4 4	2	M12 flange connector (male), A-coded

CANopen® - Cable

Terminal assignment

Core color	Assignment	Description
White	+Vs	Voltage supply
Brown	GND	Ground connection relating to +Vs
Green	d.u.	-
Yellow	d.u.	-
Grey	d.u.	-
Pink	CAN_H	CAN Bus Signal (dominant High)
Blue	CAN_L	CAN Bus Signal (dominant Low)
Red	CAN_GND	Ground connection relating to CAN

CANopen® features	
Bus protocoll	CANopen®
Device profile	CANopen® - CiA DSP 301 V4.2 Inclinometer profile DS 410 V1.3 LSS service profile DS 305 V2.2
Default	Resolution 0.1° Baud rate 50 kbit/s Node ID 1




2-dimensional, measuring range up to ±90° CANopen® / SAE J1939 / Analog

Output signals

Analog output


Measuring range ±30° / Mounting position horizontal

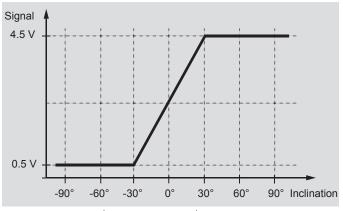





Output signals

Measuring range ±90° / Mounting position horizontal

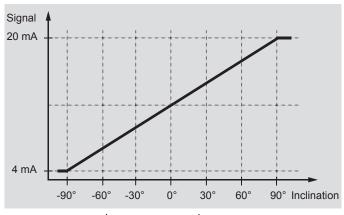

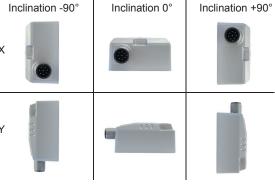

Measuring range ±60° / Mounting position vertical

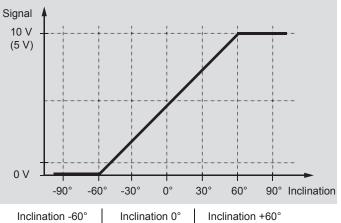







2-dimensional, measuring range up to ±90° CANopen® / SAE J1939 / Analog

Output signals

Analog output with out-of-range diagnostic (Option: /4822)


Measuring range ±30° / Mounting position horizontal

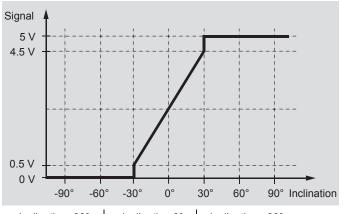


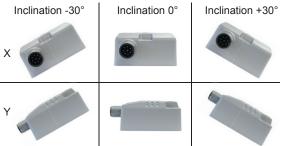


Output signals

Measuring range ±90° / Mounting position horizontal

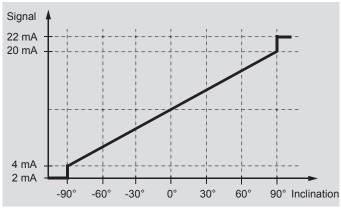

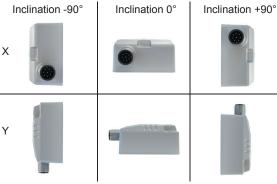


Measuring range ±60° / Mounting position vertical

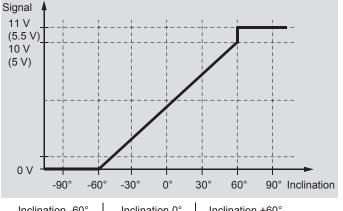




2-dimensional, measuring range up to $\pm 90^\circ$ CANopen® / SAE J1939 / Analog


Dimensions

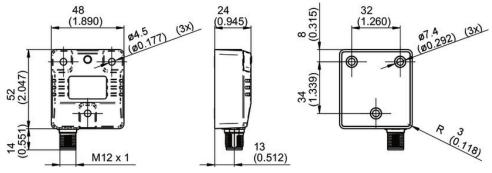

GIM500R - 1 x connector M12

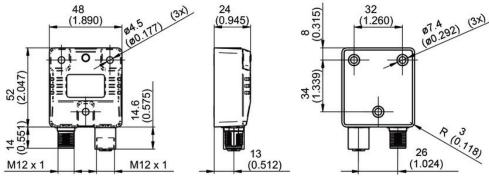

GIM500R - 2 x connector M12

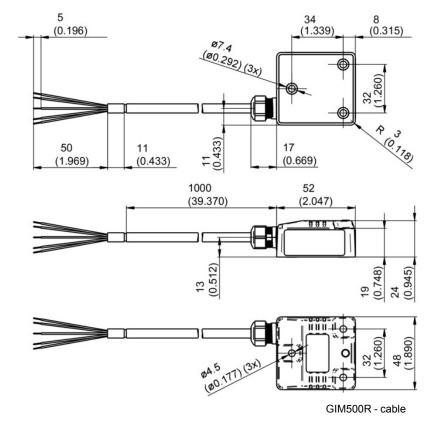



2-dimensional, measuring range up to $\pm 90^\circ$ CANopen® / SAE J1939 / Analog

Ordering reference								
	GIM500R	- M	#	###	#	##	Α	####
Product	0.11.							
Housing	GIM500R							
Metal		М						
Number of axes		IVI						
2-dimensional, housing horizontal			2					
2-dimensional, housing vertical			V					
Measuring range			•					
±10° (Analog with zero setting)				10				
±30° (Analog with zero setting)				30				
±45° (Analog with zero setting)				45				
±60° (Analog with zero setting)				60				
±90° (Analog, CANopen®, SAE J1939)				90				
Connection								
Cable 1 m, Standard 4x2x0.14 mm² (Analog, CANopen®, SAE J1939)					Κ			
Flange connector M12, 5-pin, male contacts (CANopen®, SAE J1939)					Α			
Flange connector 2xM12, 5-pin, male and female contacts (CANopen®, SAE J1939)					В			
Flange connector M12, 8-pin, male contact (Analog)					F			
Voltage supply / interface								
836 VDC / CANopen®						C6		
836 VDC / SAE J1939						C9		
836 VDC / Analog 0.54.5 V						V4		
836 VDC / Analog 05 V						V5		
836 VDC / Analog 010 V						V1		
836 VDC / Analog 420 mA						C4		
Operating temperature								
-40+85 °C							Α	
Option								
Without option								
With integrated terminating resistor (CANopen, SAE J1939)								/481
Output signal with out-of-range diagnostics (Analog)								/482

Δ	CC	9	9	20	ri	0	2

Mounting	accessories
----------	-------------

11120131 Mounting kit 3x M4 x 25 DIN912, A 4.3 DIN125 11189609 Mounting kit 3x M4 x 50 DIN912, A 4.3 DIN125,

spacers

Programm	ing a	accesso	ries
----------	-------	---------	------

11084376 ZTEST-ALL.ANALOG
11128719 USB-to-CAN V2 adaptor, D-SUB, 9-pin

2022-08-15 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.