

Encoder kit

Magnetic multiturn encoders 14 bit ST / 16 bit MT

### Overview

- Encoder kit multiturn / EtherNet/IP
- Precise magnetic sensing Resolution max. 30 bit (14 bit ST, 16 bit MT)
- Angular accuracy up to ±0.15°
- High protection up to IP 67
- High resistance to shock and vibrations
- LED status display
- Magnetic rotor included in delivery



Technical data		
Technical data - electrical ratings		
Voltage supply	1030 VDC	
Consumption typ.	90 mA (24 VDC, w/o load)	
Initializing time	≤ 10 s after power on	
Interface	EtherNet/IP	
Function	Multiturn	
Steps per revolution	≤16384 / 14 bit	
Number of revolutions	≤65536 / 16 bit	
Absolute accuracy	$\pm 0.15$ ° (+20 $\pm 15$ °C) $\pm 0.25$ ° (-40+85 °C) (see info working distance)	
Sensing method	Magnetic	
Interference immunity	EN 61000-6-2	
Emitted interference	EN 61000-6-4	
Status indicator	4x LED integrated in housing	
Approval	UL approval / E217823	

Technical data - mechanical design		
Size (flange)	ø58 mm	
Shaft type	ø6 mm (magnet bore) ø8 mm (magnet bore) ø12 mm (magnet bore)	
Protection EN 60529	IP 67	
Operating speed	≤6000 rpm	
Working distance	1.1 ±0.9 mm axial / ≤ 0.3 mm eccentricity	
Material	Housing: steel zinc-coated Flange: aluminium	
Operating temperature	-40+85 °C (see general information)	
Relative humidity	95 %	
Resistance	EN 60068-2-6 Vibration 30 g, 10-2000 Hz EN 60068-2-27 Shock 500 g, 1 ms	
Weight approx.	250 g	
Connection	Flange connector 3 x M12	

### **Optional**

Protection against corrosion CX (C5-M)

Encoder kit

Magnetic multiturn encoders 14 bit ST / 16 bit MT

#### **General information**

Self-heating correlated to installation and ambient conditions as well as to electronics and supply voltage must be considered for precise thermal dimensioning. Operating the encoder close to the maximum limits requires measuring the real prevailing temperature at the encoder flange.

Terminal assignment				
Voltage supply				
Pin	Assigned	Significance		
1	+Vs	Voltage supply		
2	d.u.	Do not connect		
3	0 V	Ground		
4	d.u.	Do not connect		



1 x flange connector M12 (male), A-coded

EtherNet/IP (data line)		
Pin	Assigned	Significance
1	TxD+	Transmission data+
2	RxD+	Receiving data+
3	TxD-	Transmission data-
4	RxD-	Receiving data-




2 x flange connector M12 (female), D-coded

EtherNet/IP features		
Bus protocol	EtherNet/IP	
Device profile	CIP Nov 2016, 22 <sub>hex</sub> Encoder	
Cycle time	1 ms	
Features	<ul> <li>Gear factor (round shaft) and endless loop mode</li> <li>Plausibility check of the adjustable parameters</li> <li>Comprehensive diagnostic functions</li> <li>Adress Conflict Detection</li> <li>Device Level Ring</li> <li>Multiple simultaneous IO connections</li> </ul>	
LED status indicator	2x Link/Activity, Module Status, Network Status	

### **Working distance**


The ideal working distance of the magnet related to the encoder is at an eccentricity of 0 mm and an axial distance of 1.1 mm. Deviation affects the accuracy as shown in following diagram.

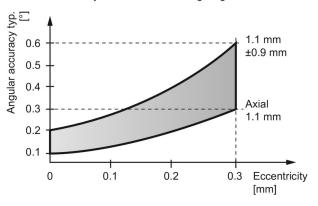

Encoder kit


Magnetic multiturn encoders 14 bit ST / 16 bit MT

### **Dimensions**

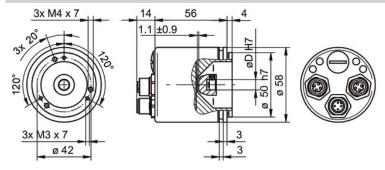

Encoder kit

Magnetic multiturn encoders 14 bit ST / 16 bit MT

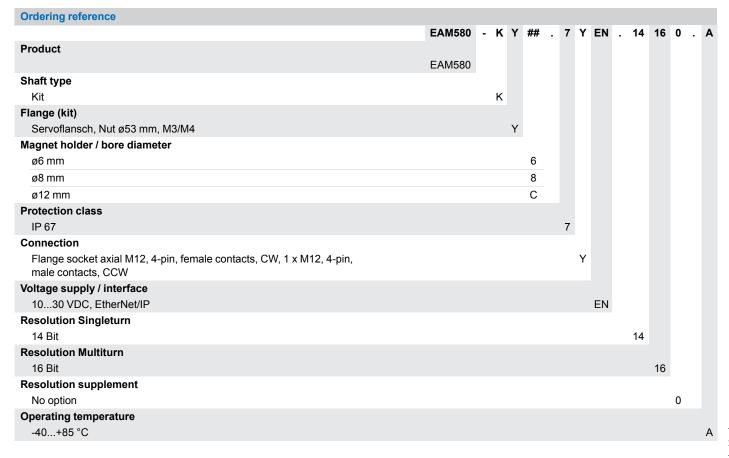

#### Accessories

### Mounting accessories

10252773

Clamp set ø15 mm