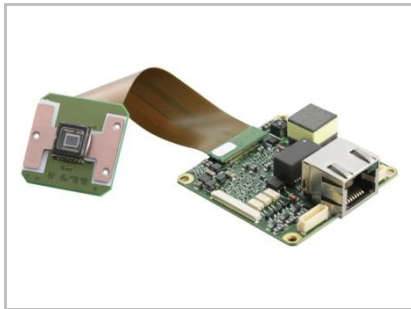


# MXGC40c.2 Technical Data

 Art. No.  
11115308


## Digital Color Matrix Camera Module, Gigabit Ethernet

### Sensor Information

Model Name	CMOSIS CMV-4000 (V3)
Type	1" progressive scan CMOS
Shutter	Global
Native Resolution	2040 x 2044 pixels
Scan Area	11.22 mm x 11.24 mm
Pixel Size	5.5 $\mu\text{m}$ x 5.5 $\mu\text{m}$


### Data Quality

@ 20 °C, gain = 1, exposure time = 32 msec


Readout Noise ( $\sigma$ )	0.3 LSB @ 8 bit, 4.5 LSB @ 12 bit (typical)
Dynamic Range	60 dB (typical)

### Acquisition Formats

Image Formats	Format	Resolution	Frame Rate	$t_{\text{readout}}$
Pixel Formats	Full Frame	2040 x 2044	29 fps	34.5 msec
Partial Scan	Mono8, BayerRG8, BayerRG12, RGB8Packed, BGR8Packed, YUV411Packed, YUV422Packed, YUV444Packed			
	True Partial Scan, Region of Interest (ROI) arbitrary			

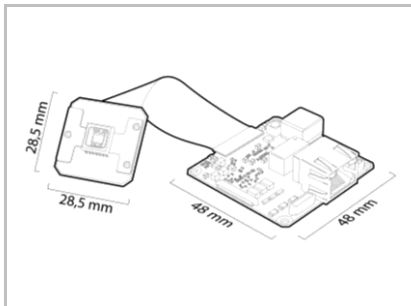

Sensor Graph: Relative Response

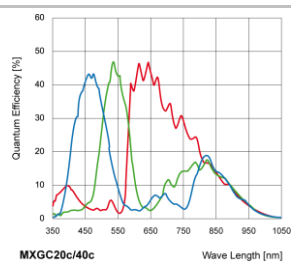

MXGC20c/40c



Wave Length [nm]

### Image Pre-Processing

Analog Controls	Exposure Time (20 $\mu\text{sec}$ ... 1 sec   Step Size 1 $\mu\text{sec}$ ) Gain (0 ... 18 dB), Offset (0 ... 255 LSB   12 bit),
Gamma Correction	Gamma (0.1 ... 2   available if LUT is enabled)
LUT	Luminance (12 bit)
Color Models	RGB, YUV, Mono
Color Tolerance	0.2% (typical)
Color Processing	Integrated color processor for high quality color calculation
Color Adjustment	White Balance (manual & one push)
Binning Horizontal	1 or 2 (true color binning)
Binning Vertical	1 or 2 (true color binning)
Image Flipping	Horizontal, vertical
Defect Pixel Correction	via Defect Pixel List with up to 511 Pixel Coordinates

### Process Synchronization






Modes	Free Running, Trigger
Free Running	Continuous or Adjustable Acquisition Frame Rate <sup>1</sup> (0 ... 9.427 Hz)
Trigger Sources	Hardware, Software, ActionCommand, All or Off
Trigger Delay	0 ... 2 sec, Tracking and buffering of up to 512 triggers
Sequencer Characteristics	up to 128 sets of parameters, up to 65536 loop passes, up to 65536 repetitions of sets of parameters, up to 65536 images per trigger event
Sequencer Parameters	Exposure Time, Gain Factor, Output Line, ROI Offset x, ROI offset y
External Flash Sync	via Exposure Active $t_{\text{delay flash}} \leq 3 \mu\text{sec}$ , $t_{\text{duration}} = t_{\text{exposure}} + 18 \mu\text{sec}$

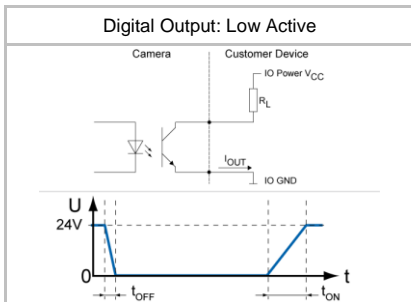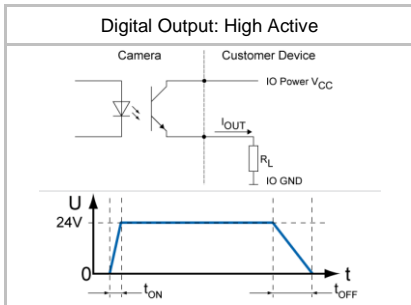

### Digital I/Os

Lines	Input: Line 0, Output: Line1, Line 2, Line 3
Circuit Times	Output: $t_{\text{ON}} = \text{typ. } 3 \mu\text{sec}$ $t_{\text{OFF}} = \text{typ. } 40 \mu\text{sec}$
Output Sources	Off, ExposureActive, Line 0, Timer1 ... 3, ReadoutActive, User1 ... 3, TriggerReady, TriggerOverlapped, TriggerSkipped, Sequencer Output 0 ... 2
Line Debouncer	Low and high signal separately selectable Debouncing Time 0 ... 5 msec, Step Size: 1 $\mu\text{sec}$


<sup>1</sup> Max. Acquisition Frame Rate can be achieved by using the following camera settings: min. Exposure + max. Binning + ROI | min. Size Y + Mono8

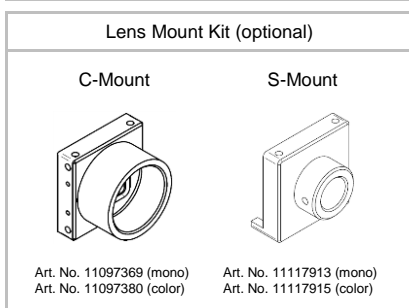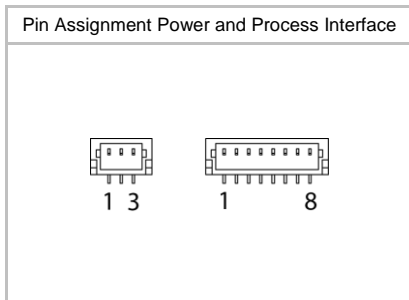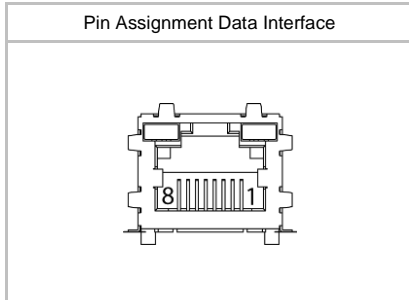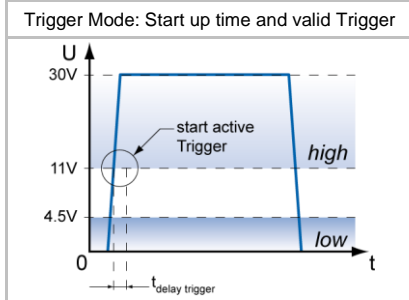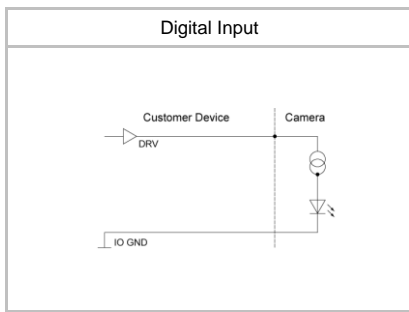

### Interfaces and Connectors

<b>Data Interface</b>	Gigabit Ethernet	Transfer Rate	1000 Mbits/sec
	Fast Ethernet	Transfer Rate	100 Mbits/sec
	Connector:	8P8C Modular Jack (RJ45)	
	Pin Assignment:	1 – MX1+	5 – MX3-
		2 – MX1-	6 – MX2-
		3 – MX2+	7 – MX4+
		4 – MX3+	8 – MX4-
<b>Process Interface</b>	Connector:	JST BM08B-SRSS-TB	
	Assignment:	1 – Shielding	5 – OUT 2
		2 – IN1	6 – OUT 3
		3 – IO GND	7 – IO Power VCC
		4 – OUT 1	8 – Shielding
<b>Power Interface</b>	Connector:	JST BM03B-SRSS-TB	
	Assignment:	1 – Shielding	
		2 – Power VCC+	
		3 – Power GND	

### Mechanical Data



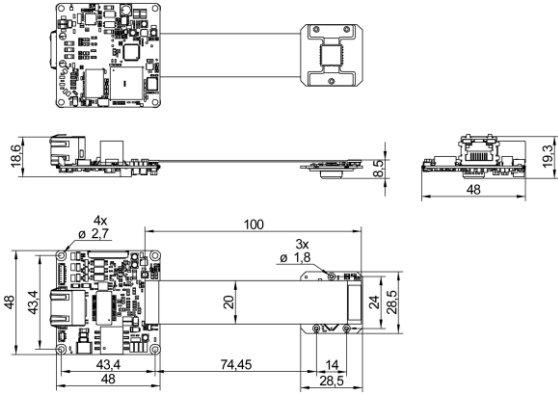
<b>Housing</b>	Board Level Module without Housing
<b>Dimensions</b>	
<b>Weight</b>	30 g (without Optics Adapter)

### Optical Data

<b>Lens Mount</b>	C-Mount (Adapter)
<b>Optical Filter</b>	Dust Protection Glass

### Electrical Data

<b>Power Supply (ext.)</b>	VCC:	12 ... 24 V DC ± 20%
	I:	149 ... 286 mA
<b>Power over Ethernet</b>	Class 0 device	
	VCC:	36 ... 57 V DC
	I:	80 mA @ 48 VDC
<b>Power Consumption</b>	approx.	3.6 W @ 12 VDC and 29 fps
	approx.	3.8 W @ 48 VDC (PoE) and 29 fps
<b>Digital Input</b>	$U_{IN(low)}$ :	0.0 ... 4.5 VDC
	$U_{IN(high)}$ :	11.0 ... 30.0 VDC
	$I_{IN}$ :	6.0 ... 10 mA
	min. Impulse Length:	2.0 µsec
	Trigger Delay out of treadout:	1.0 µsec
	max. Trigger Delay during treadout:	14.0 µsec
<b>Digital Output</b>	$U_{EXT}$ :	5 ... 30 V DC
	$I_{OUT}$ :	max. 50 mA

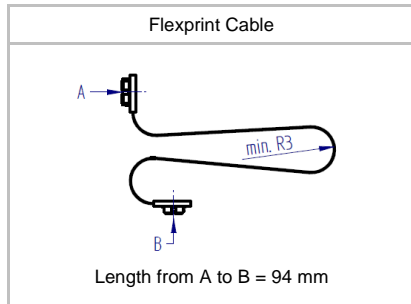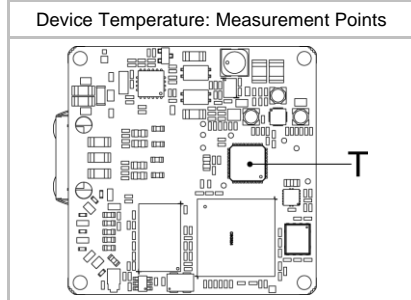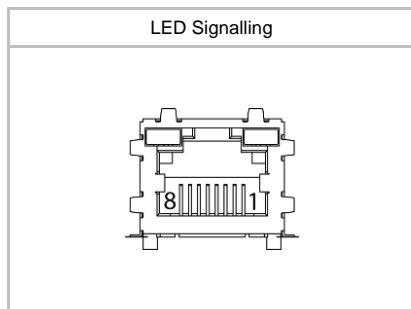

### LED Signalling

LED 1 (right)	Green	Link active
	Green flash	Receiving
LED 2 (left)	Yellow	Transmitting

### Environmental Data

Storage Temperature	-10 °C bis +70 °C		
Operating Temperature	Depends on the thermal encapsulation		
Device Temperature	T <sub>max</sub> = 70 °C @ Measurement Point		
Humidity	10 % ... 90 % non-condensing		
Conformity	RoHs, REACH		

### Network Interface Data

Network Interface	Gigabit Ethernet	1000BASE-T	1000 Mbits/sec
	Fast Ethernet	100 BASE-T	100 Mbits/sec
Ethernet IP Configuration	Persistent IP, DHCP, LLA		
Packet Size	576 ... 16 KByte, Jumbo Frames supported		

### GigE Vision® Features (in compliance with GigE Vision® 1.2)

Events Transmission via Asynchronous Message Channel	PrimaryApplicationStitch, GigEVisionError, GigEVisionHeartbeatTimeOut, EventLost, EventDiscarded, Line0RisingEdge, Line0FallingEdge, Line1RisingEdge, Line1FallingEdge, Line2RisingEdge, Line2FallingEdge, Line3RisingEdge, Line3FallingEdge, ExposureStart, ExposureEnd, FrameStart, FrameEnd, TriggerReady, TriggerOverlapped, TriggerSkipped		
Frame Counter	up to 2 <sup>32</sup>		
Payload Size	4 ... 12.534.080 Byte		
Transmission Delay	0 ... 2 <sup>32</sup> -1 Ticks (1 Tick = 32 nsec)		
Timestamp	64 bit		
Packet Delay	0 ... 2 <sup>32</sup> -1 Ticks		
Packet Resend	Resend Buffer:	120 MB (10 Images)	

### GeniCam™ Features (in compliance with SFNC 1.5.1)

Timer	Timer Selector: Timer 1 ... 3	
	TimerTriggerSource: Line0, SoftwareTrigger, CommandTrigger, ExposureStart, ExposureEnd, FrameStart, FrameEnd, TriggerSkipped, Off	
	TimerDelay:	0 µsec ... 2 sec, Step Size: 1 µsec
	TimerDuration:	10 µsec ... 2 sec, Step Size: 1 µsec
User Sets	Factory Settings:	UserSet0 (read only)
	Freely Programmable:	UserSet1, UserSet2, UserSet3
	Parameters:	any user definable Parameter
Acquisition Abort	Delay up to 69 msec	

### Vendor Specific Features

FPN Correction
HDR

**Factory Settings after Start-Up**

Operation Mode	Free Running
Analog Controls	Exposure Time: 4 msec, Gain: 0 dB, Offset: 0
Pixel Format	BayerRG8
Partial Scan	Off
Acquisition Frame Rate	Off
Timer	Off
Transmission Delay	Off
Defect Pixel Correction	On
Digital Input	Line0, invert = false, trigger source = All
Digital Output	Line1, invert = false, line source = Off