

overview

- 1 mm
- PNP make function (NO)
- flylead connector M8
- -25 ... 75 °C
- IP 67



Picture similar



Technical data

general data

mounting type	flush
nominal sensing distance S _n	1 mm
hysteresis	2 ... 20 % of S _r
output indicator	LED red

electrical data

switching frequency	< 5 kHz
voltage supply range +V _s	10 ... 30 VDC
current consumption max. (no load)	12 mA
output circuit	PNP make function (NO)
voltage drop V _d	< 2 VDC
output current	< 100 mA

electrical data

short circuit protection	yes
reverse polarity protection	yes


mechanical data

type	cylindrical threaded
material (sensing face)	LCP
housing material	stainless steel
dimension	5 mm
housing length	25 mm
connection types	flylead connector M8, L=200 mm
tightening torque max.	2 Nm (Front: 1,4 Nm)

ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

dimension drawing

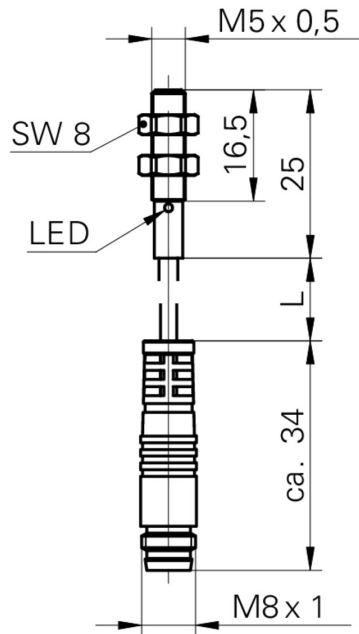

connection diagram

